


# KV-1882AEB

## RM-626

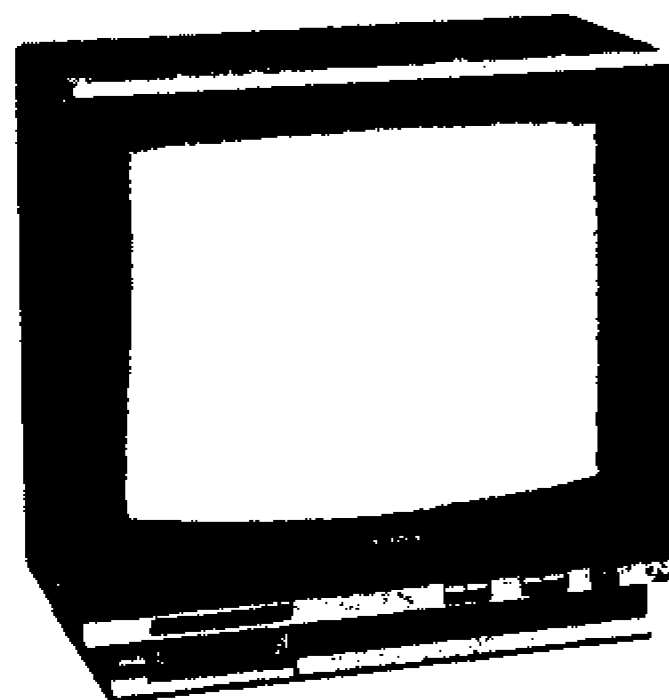

### *PX Model*

*Serial No. 500,001 – 505,300*

*Chassis No. SCC-573A-A*

*Serial No. 503,001 and later*

*Chassis No. SCC-573A-B*

### *E Model*

*Chassis No. SCC-573A-B*

December, 1984


## XE-3 CHASSIS


### SPECIFICATIONS



Television system	CCIR system B, G and H	CCIR system I	System M
Color system	European PAL	UK PAL	NTSC
Channel coverage	VHF E2–E12 Cable TV S1–S3, M1–M10 and U11–U20 UHF E21–E68	UHF B21–B68	VHF A2–A13 Cable TV A–2–W UHF A14–A78

Picture tube	(a total of up to 30 preselected channels) Trinitron tube Approx. 47.2 cm (18 inches) 90 degree deflection (Approx. 43.7 cm picture measured diagonally)
Antenna	75-ohm standard coaxial socket
Speaker	5 × 9 cm
Audio output	2 W
Power requirements	110–240 V AC, 50/60 Hz
Power consumption	82 W 12.5 W in stand-by condition
Dimensions	Approx. 452 × 440 × 470 mm (w/h/d)
Weight	Approx. 19.5 kg
Accessory supplied	Remote Commander RM-626 (1)



# BLOCK DIAGRAM

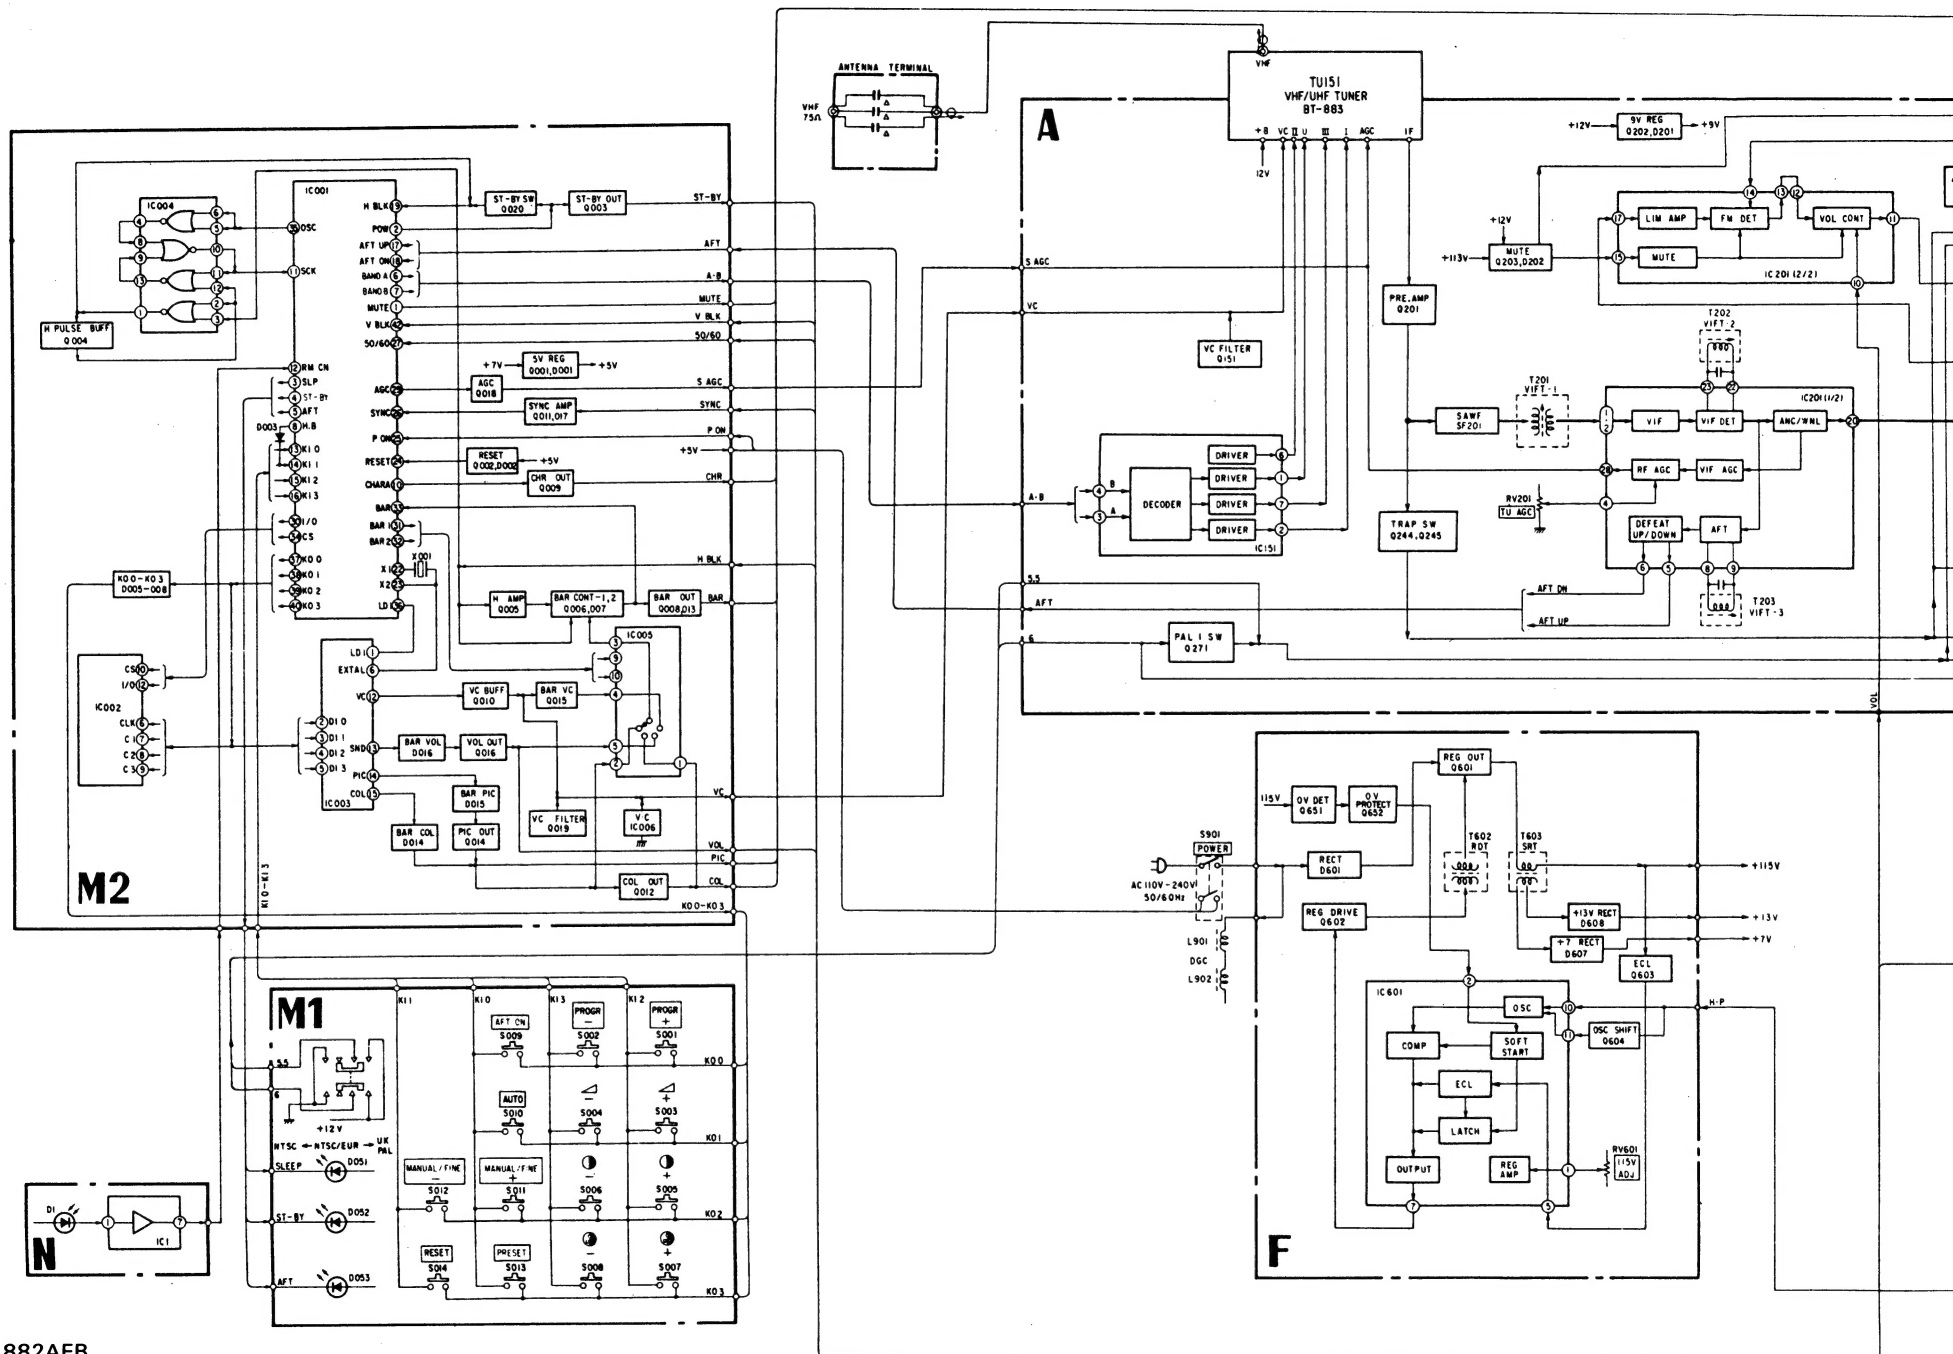

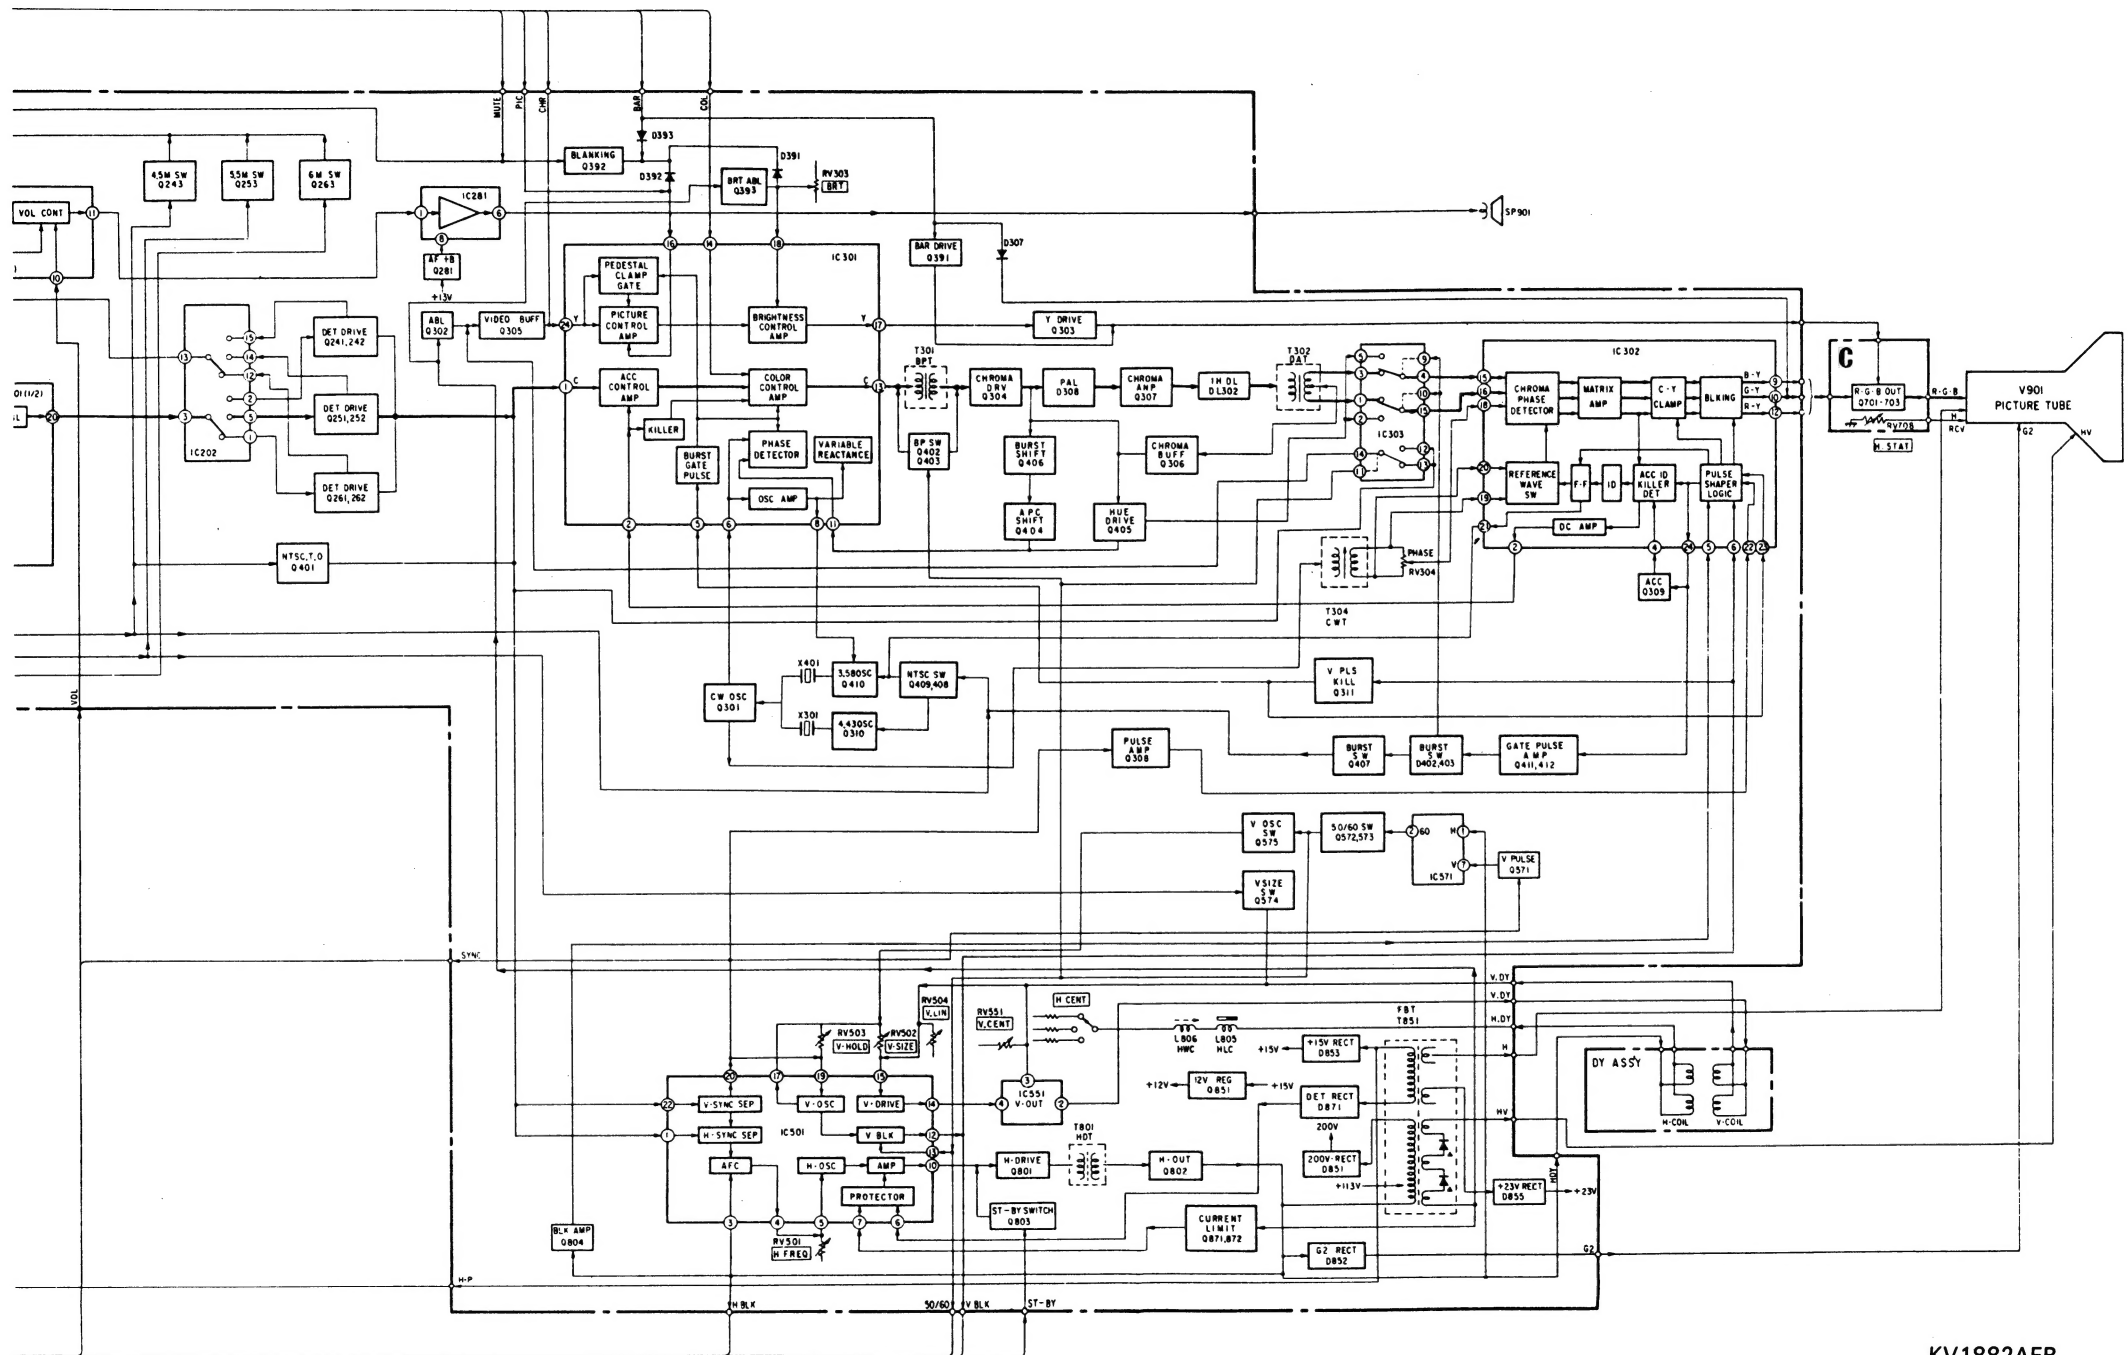


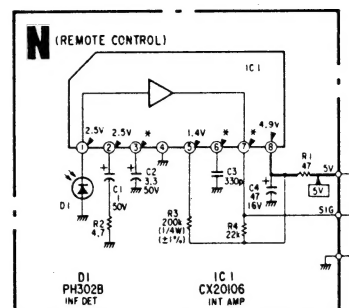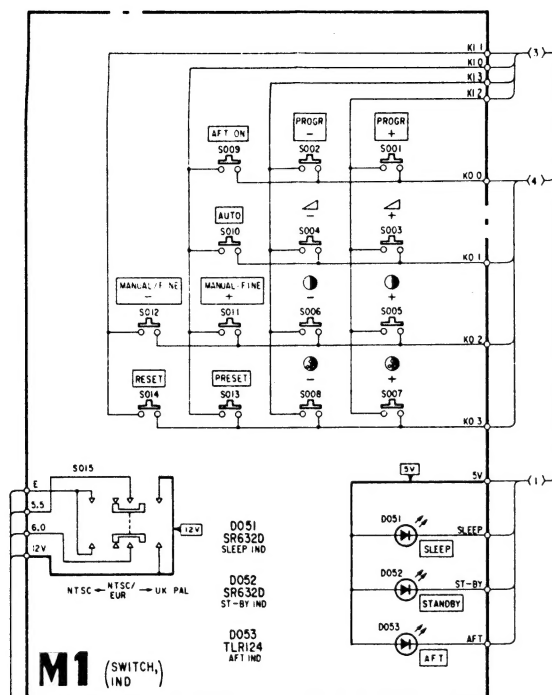


**CAUTION**  
When replacing IC601, be sure to check the +B voltage value. Refer to the Safety Adjustment Section.

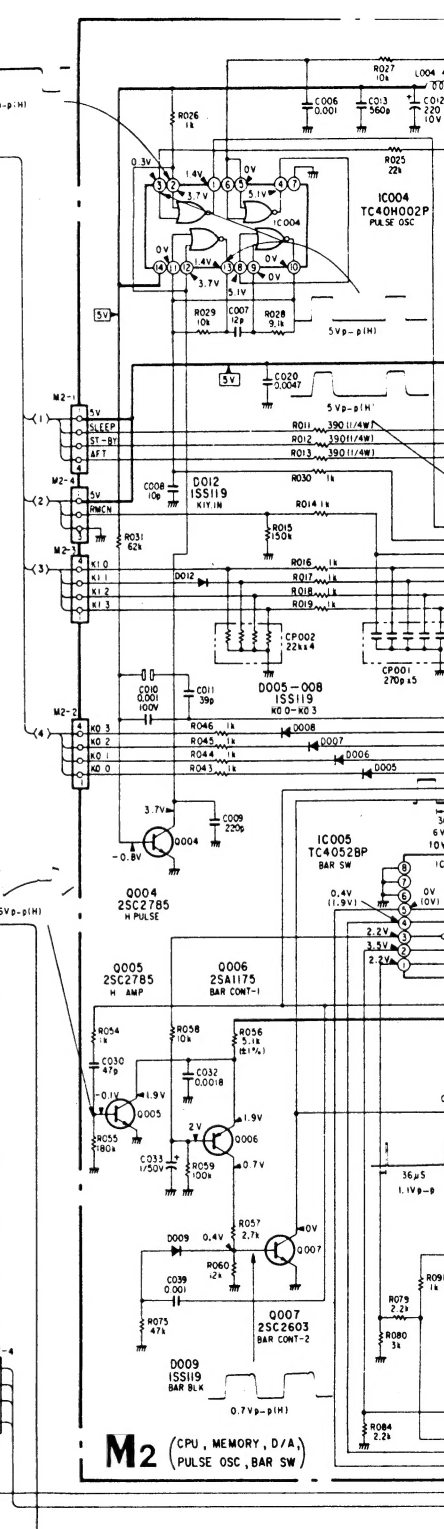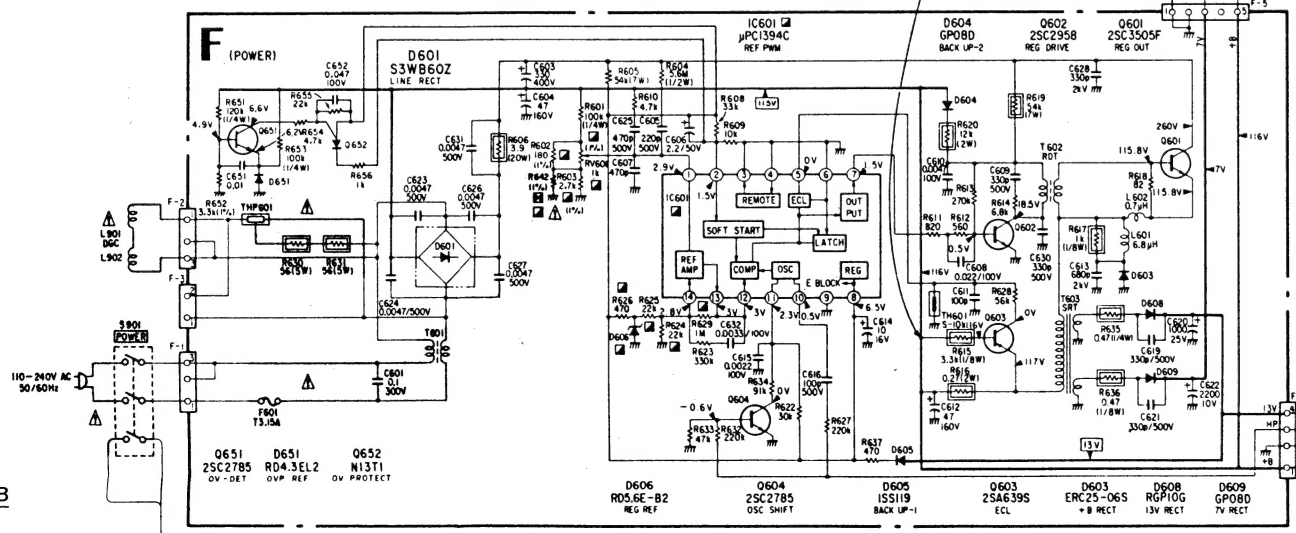










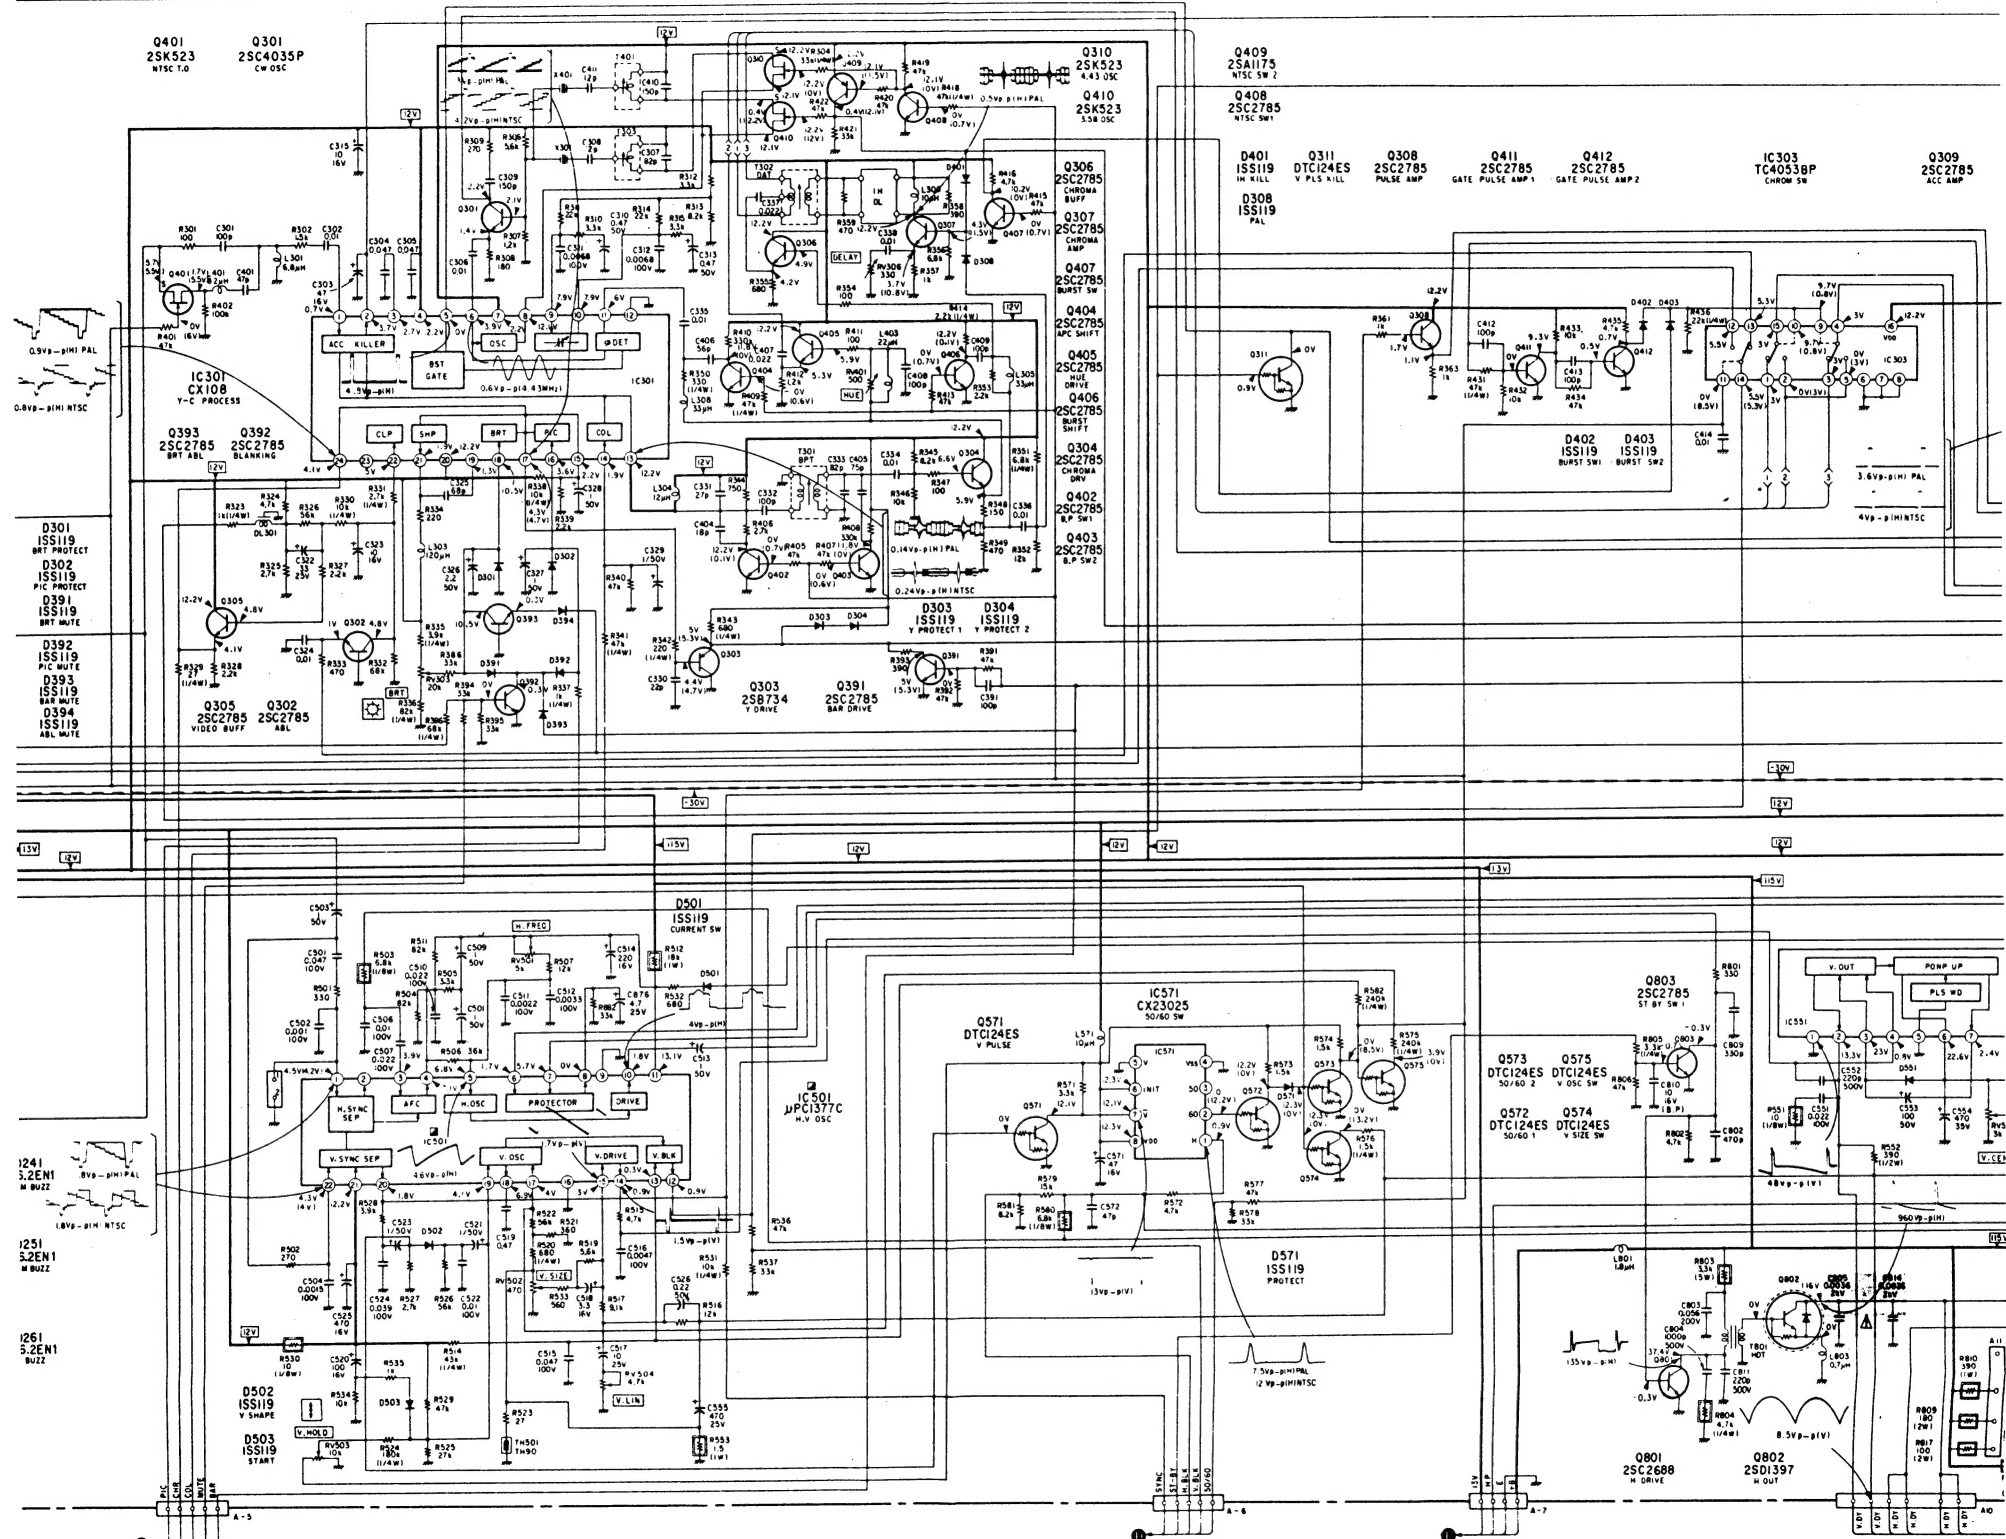


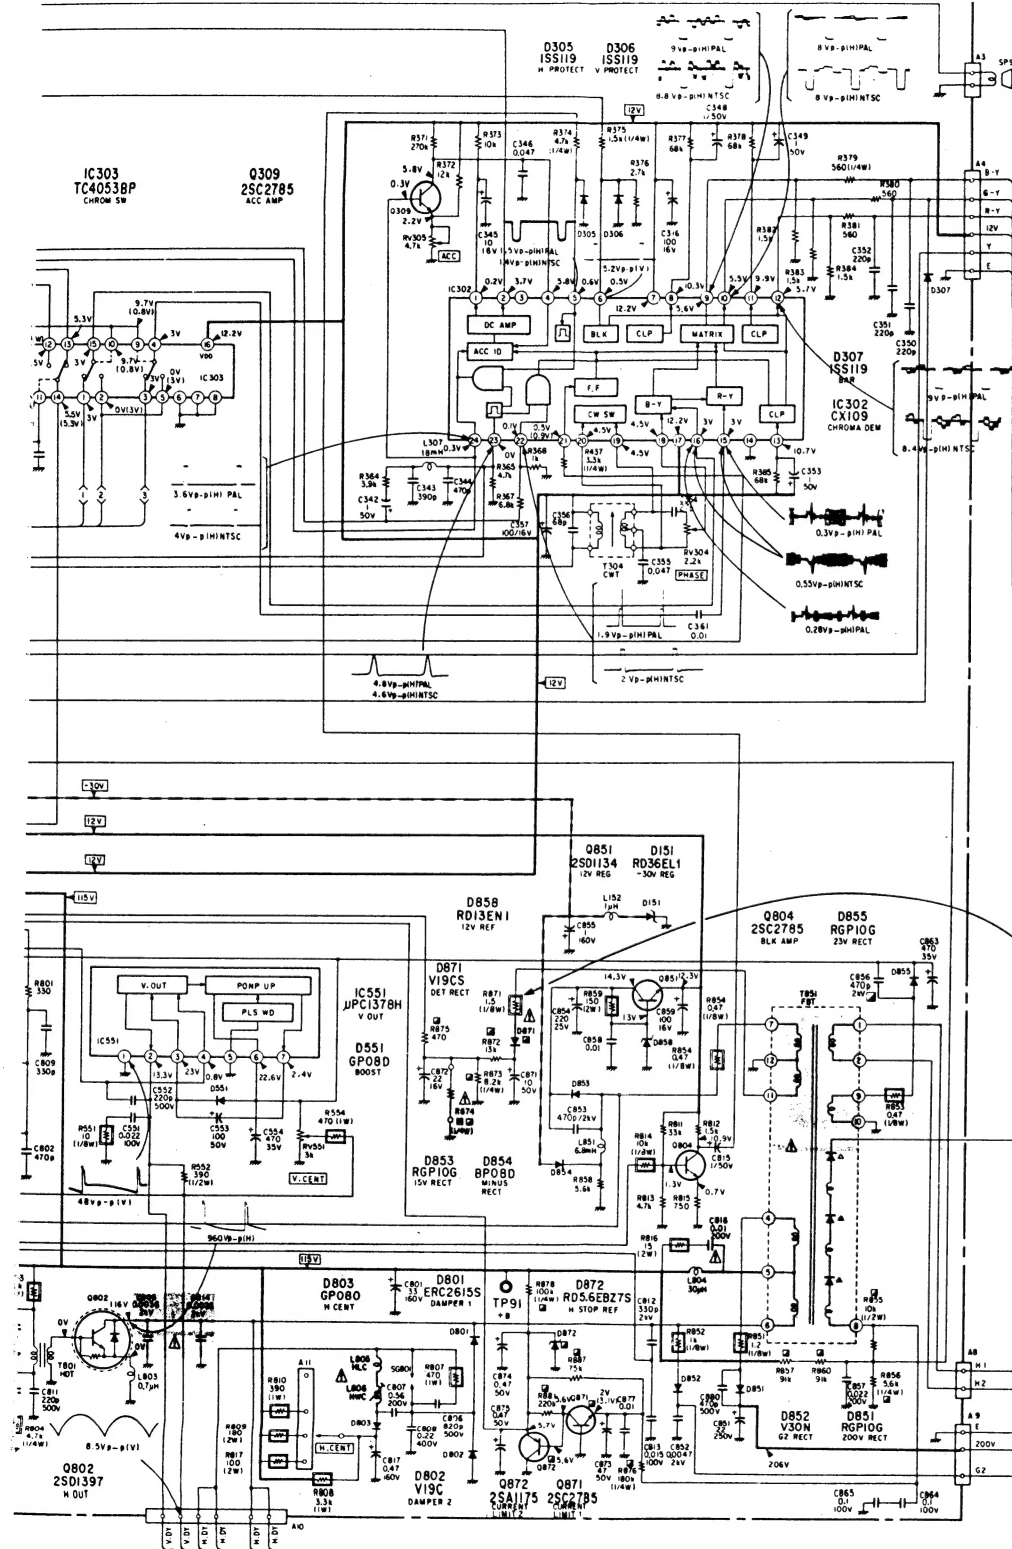

**CAUTION**  
Be sure to connect the connector C-1 for safety.

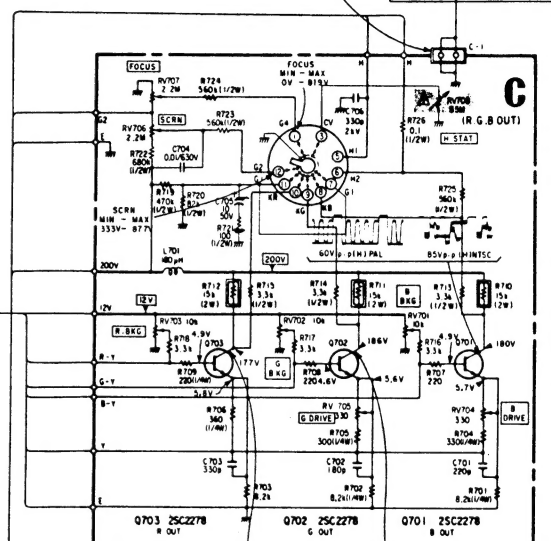


**CAUTION**  
After replacing R871, confirm that the voltage more than 12.5 V dc is presented at TP-86.








— C Board —

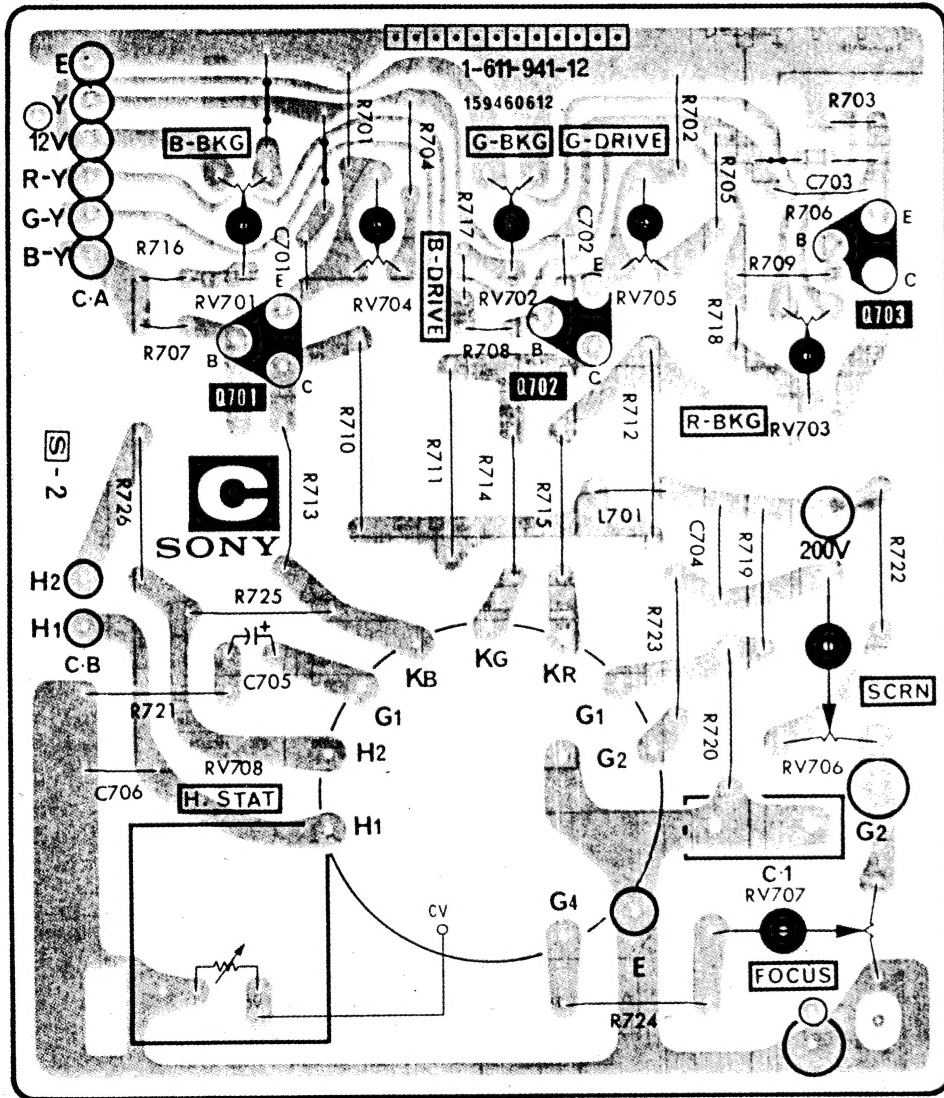


— M2 Board —

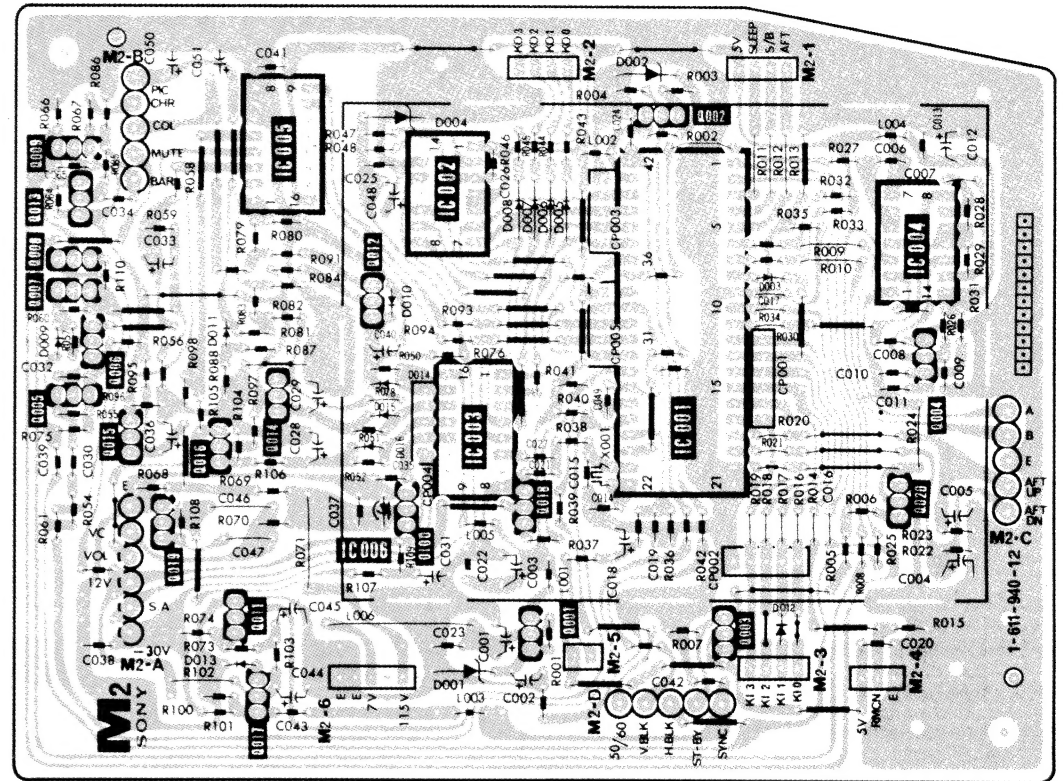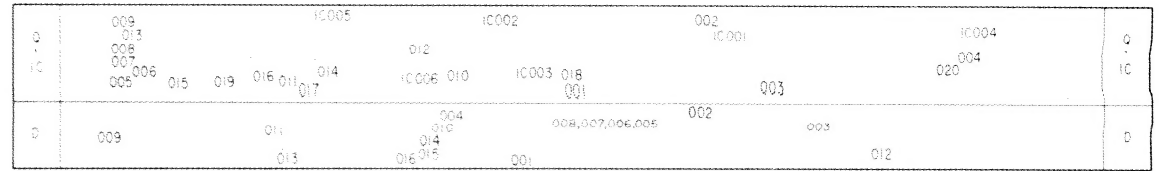

— M1 Board —

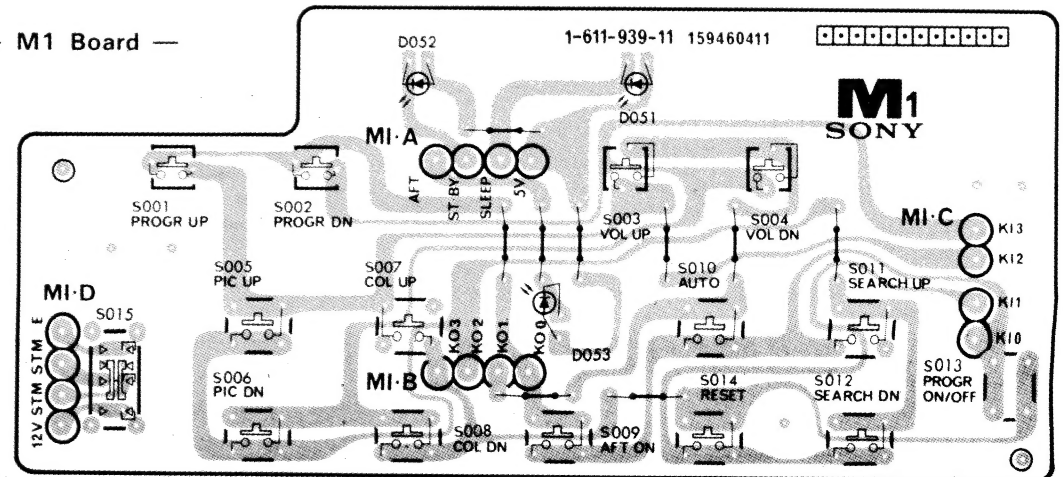



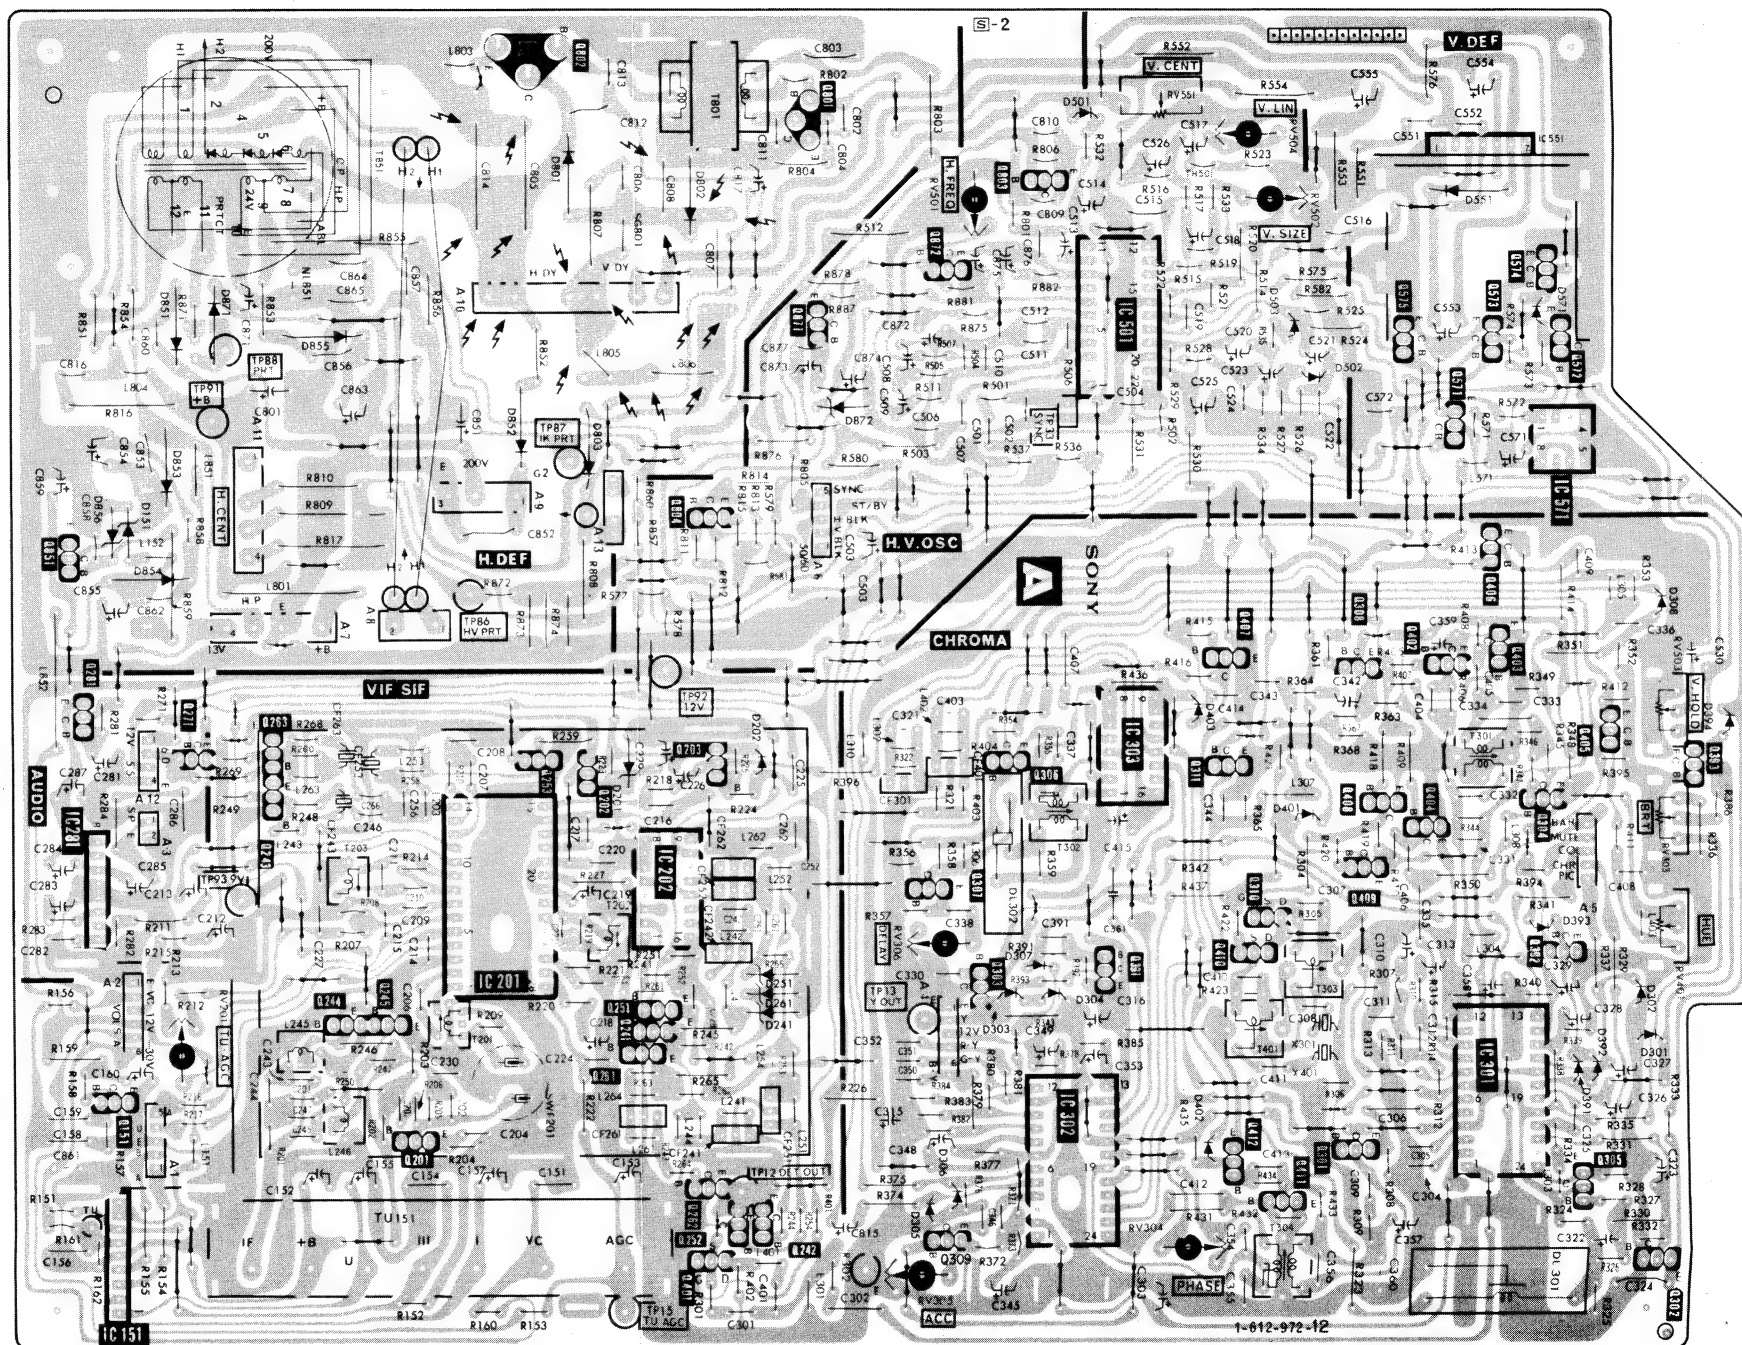



## EXPLODED VIEWS


### NOTE:

- Items with no part number and no description are not stocked because they are seldom required for routine service.
- The construction parts of an assembled part are indicated with a collation number in the remark column.

- As to the part numbered with E-, refer to the electrical parts list.
- Items marked "\*" are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.

### 1. BACK COVER

• : TA, BV3x12 7-685-648-71

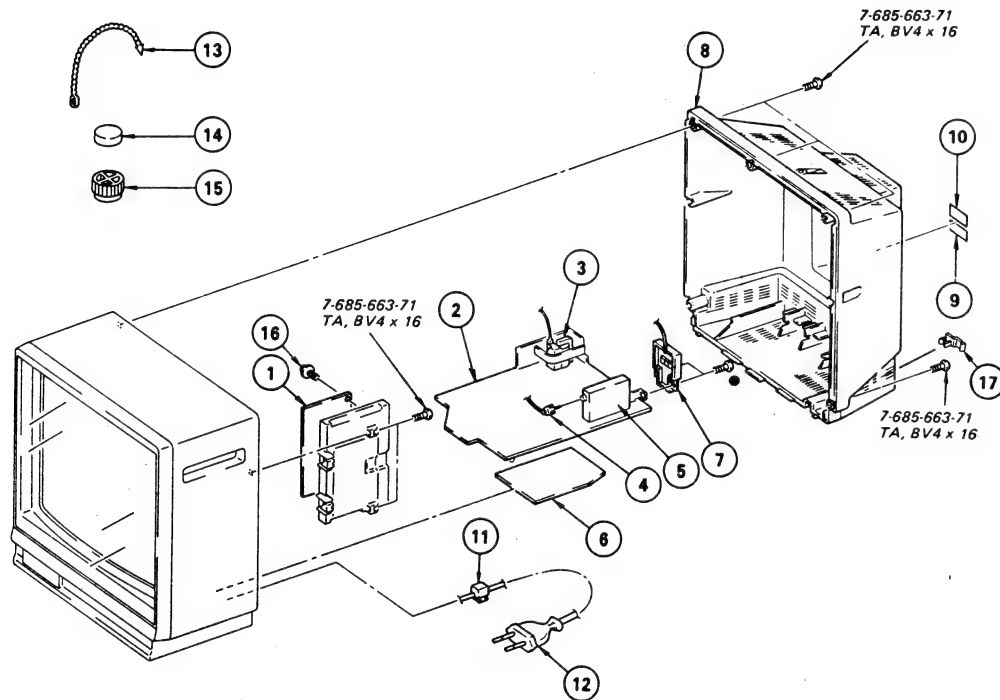


No.	Part No.	Description	Remark	No.	Part No.	Description	Remark
1	*A-1245-229-A	F BOARD, COMPLETE		9	4-010-023-05	LABEL, X-RAY	
2	*A-1295-895-A	A BOARD, COMPLETE		10	*A-371-545-01	LABEL, MODEL NUMBER	
3	A-1-439-333-11	TRANSFORMER ASSY, BACK		11	A-1-022-115-01	HOLDER, C CORD	
4	*1-534-805-00	PIN CABLE		12	A-1-551-427-21	CORD, POWER, EULO. PLUG	
5	A-1-463-421-00	TUNER, ET (BT-883)		13	4-308-870-00	CLIP, LEAD WIRE	
6	*A-1301-598-A	M2 BOARD, COMPLETE		14	1-452-032-00	MAGNET, DISK; 10MM	
7	A-1-536-494-21	ANT. TERMINAL ASSY		15	1-452-094-00	MAGNET, ROTATABLE DISK; 15MM	
8	X-4371-509-2	COVER ASSY, BACK	17	16	4-302-428-00	HEAD, WASHER, TAPPING SCREW	
				17	4-329-127-00	CLAMP, CORD	

KV1882AEB

488

### 2. PICTURE TUBE

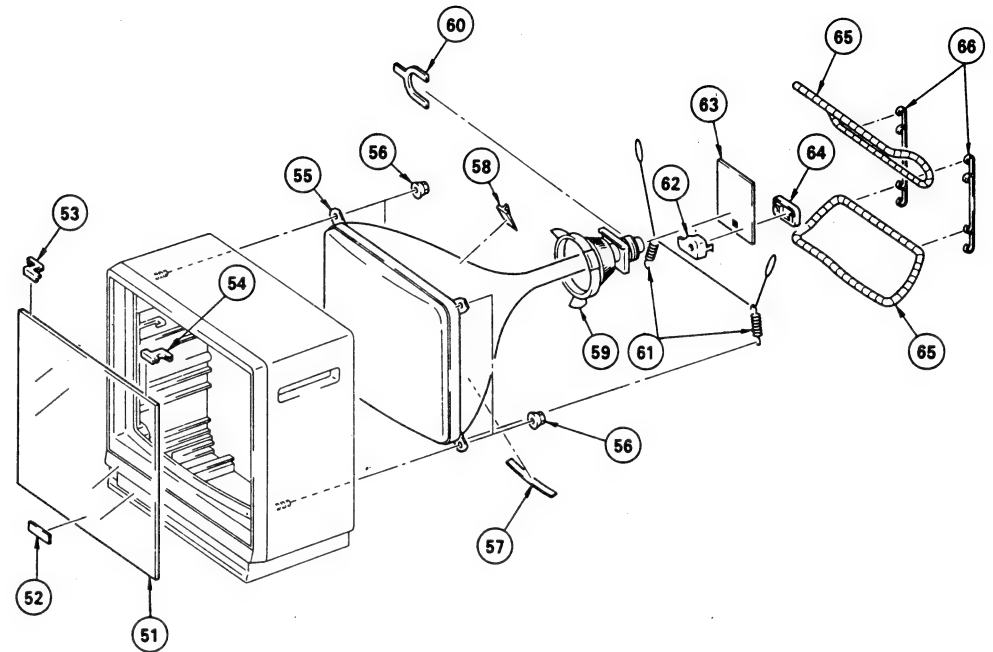


No.	Part No.	Description	Remark	No.	Part No.	Description	Remark
51	4-369-314-01	GLASS, FILTER		59	A-1-451-247-11	DEFLECTION Yoke (SC-1391)	
52	X-3701-081-0	EMBLEM (MIDDLE) ASSY, SONY		60	1-452-277-00	MAGNET, BMC	
53	4-369-420-00	STOPPER (LEFT), FILTER		61	4-369-318-00	SPRING, TENSION	
54	4-369-419-00	STOPPER (RIGHT), FILTER		62	*A-365-803-00	COVER (MAIN), CV CONTROL	
55	A-8-736-153-05	CRT (A46JF200X)		63	*A-1330-499-A	C BOARD, COMPLETE	
56	4-306-034-00	FLANGE NUT, (B) 5MM		64	*A-365-804-00	COVER (READ LID), CV CONTROL	
57	4-369-324-01	CLOTH		65	A-1-426-179-11	COIL, DEGAUSSING	
58	3-703-961-01	SPACER, DY		66	*A-371-521-01	BAND (L), DEGAUSS COIL	



## 3. BEZEL ASSY

• TA, BV3x12 7-685-648-71

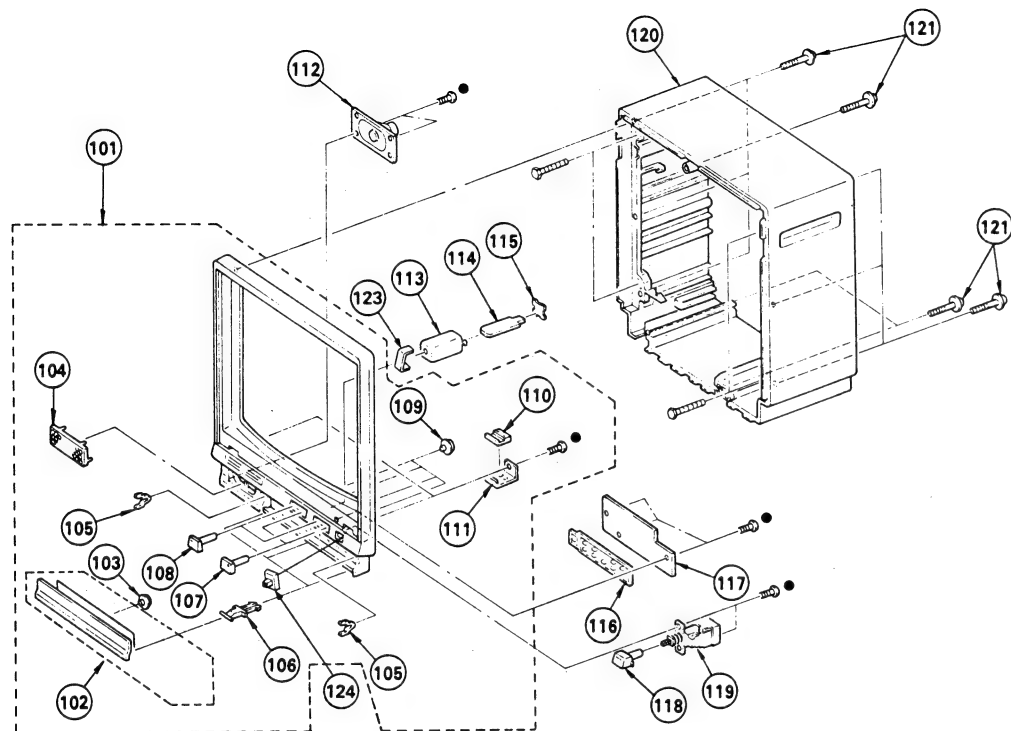

No.	Part No.	Description	Remark	No.	Part No.	Description	Remark
101	X-4371-512-1	BEZEL ASSY	102,103,104,105,106,107,108,109,110,111	111	4-336-806-00	HOLDER (RIGHT), FILTER	
102	X-4371-511-1	DOOR ASSY, CONTROL	122	112	1-503-239-00	SPEAKER	
103	*:4-371-504-01	TUBE, OPTICAL		113	*:4-342-117-00	CASE, SHIELD (MAIN), R	
104	*:4-371-503-01	PLATE, ORNAMENTAL, SPEAKER		114	*:1-611-717-11	M BOARD	
105	3-703-574-00	RETAINER, DOOR		115	*:4-342-118-00	LID, SHIELD CASE, R	
106	3-662-365-00	SHAFT (S), DOOR		116	4-371-509-01	BUTTON, MULTI	
107	4-354-587-11	PUSH BOTTON (+)		117	*:1-611-939-11	MI BOARD	
108	4-354-588-11	PUSH BOTTON (-)		118	4-371-502-01	BUTTON, POWER	
109	4-365-220-00	STOPPER, BUTTON		119	*:1-553-225-12	SWITCH, PUSH	
110	4-336-808-00	PROTECTOR, FILTER		120	4-369-312-21	CABINET	
				121	4-319-520-00	SCREW, SPECIAL (+PW4x30)	
				123	4-333-624-00	FILM (M), SPECIAL	
				124	4-371-542-01	KNOB, SLIDE SWITCHING	

## ELECTRICAL PARTS LIST

F

NOTE:

CAPACITORS COILS  
 \* MF :  $\mu$ F, PF :  $\mu$ F \* MMH : mH, UH :  $\mu$ H

RESISTORS  
 \* All resistors are in ohms  
 \* F : nonflammable

\* Items marked " \* " are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.

\* All variable and adjustable resistors have characteristic curve B, unless otherwise noted.

Ref.No.	Part No.	Description	Remark	Ref.No.	Part No.	Description	Remark
*A-1245-229-A F BOARD, COMPLETE *****				CONNECTOR			
	1-533-087-00	HOLDER, FUSE		F1	*:1-506-349-21	3P PLUG (L)	
	4-363-414-00	SPACER, MICA		F2	*:1-508-765-00	3P PLUG (M)	
	*:4-370-012-01	HOLDER, TRANSISTOR		F3	*:1-508-786-00	2P PLUG (M)	
				F4	*:1-508-766-00	4P PLUG (M)	
				F5	*:1-560-125-00	PLUG, CONNECTOR (2.5MM PITCH)	
CAPACITOR				FUSE			
C601	A.1-108-747-62	MYLAR 0.1MF 20% 300V		F601	A.1-532-237-11	FUSE, TIME-LAG 3.15A	
C603	1-125-222-21	ELECT (BLOCK) 330MF 20% 400V		IC			
C604	1-121-919-00	ELECT 47MF 160V		IC601	8-759-100-75	IC UPC1394C	
C605	1-102-244-00	CERAMIC 220PF 10% 500V		COIL			
C606	1-123-381-00	ELECT 2.2MF 20% 50V		L601	1-408-300-00	MICRO INDUCTOR 6.8UH	
C607	1-102-824-00	CERAMIC 470PF 5% 50V		L602	1-407-365-00	COIL, CHOKE	
C608	1-106-204-00	MYLAR 0.022MF 10% 100V		TRANSISTOR			
C609	1-102-030-00	CERAMIC 330PF 10% 500V		Q601	8-729-900-48	TRANSISTOR 2SC3505F	
C610	1-106-188-00	MYLAR 0.0047MF 10% 100V		Q602	8-729-195-82	TRANSISTOR 2SC2958	
C611	1-102-973-00	CERAMIC 100PF 5% 50V		Q603	8-729-163-93	TRANSISTOR 2SA639S	
C612	1-121-919-00	ELECT 47MF 160V		Q604	8-729-245-83	TRANSISTOR 2SC2458	
C613	1-102-249-00	CERAMIC 680PF 20% 2KV		Q651	8-729-245-83	TRANSISTOR 2SC2458	
C614	1-123-356-00	ELECT 1UMF 20% 16V		Q652	8-729-101-31	TRANSISTOR N13T1	
C615	1-106-180-00	MYLAR 0.0022MF 5% 100V		RESISTOR			
C616	1-101-810-00	CERAMIC 100PF 5% 500V		R601	1-214-777-00	METAL 100K 1% 1/4W	
C619	1-102-030-00	CERAMIC 330PF 10% 500V		R602	1-215-403-00	METAL 180 1% 1/6W	
C620	1-123-349-00	ELECT 1000MF 20% 25V		R603	1-215-431-00	METAL 2.7K 1% 1/6W	
C621	1-102-030-00	CERAMIC 330PF 10% 500V		R604	1-202-663-35	SOLID 5.6M 10% 1/2W	
C622	1-123-325-00	ELECT 2200MF 20% 10V		R605	1-205-687-11	CEMENTED 54K 10% 7W	
C623	1-161-830-00	CERAMIC 0.0047MF 500V		R606	1-205-712-00	CEMENTED 3.9 5% 20W	
C624	1-161-830-00	CERAMIC 0.0047MF 500V		R608	1-247-867-00	CARBON 33K 5% 1/6W	
C625	1-102-228-00	CERAMIC 470PF 500V	10%	R609	1-247-855-00	CARBON 10K 5% 1/6W	
C626	1-161-830-00	CERAMIC 0.0047MF 500V		R610	1-247-847-00	CARBON 4.7K 5% 1/6W	
C627	1-161-830-00	CERAMIC 0.0047MF 500V		R611	1-247-829-00	CARBON 820 5% 1/6W	
C628	1-162-115-00	CERAMIC 330PF 10% 2KV		R612	1-247-825-00	CARBON 560 5% 1/6W	
C630	1-102-030-00	CERAMIC 330PF 10% 500V		R613	1-247-889-00	CARBON 270K 5% 1/6W	
C631	1-161-830-00	CERAMIC 0.0047MF 500V		R614	1-247-851-00	CARBON 6.8K 5% 1/6W	
C632	1-106-184-00	MYLAR 0.0033MF 10% 100V		R615	1-247-614-00	CARBON 3.3K 5% 1/8W	
C651	1-161-051-00	CERAMIC 0.01MF 10% 50V		R616	1-217-193-00	WIREWOUND 0.27 10% 2W	F
C652	1-106-212-00	MYLAR 0.047MF 10% 100V		R617	1-247-831-00	CARBON 1K 5% 1/8W	F
DIODE				R618	1-247-805-00	CARBON 82 5% 1/6W	F
D601	8-719-503-06	DIODE S3MB60Z		R619	1-205-687-00	CEMENTED 54K 10% 7W	
D603	8-719-925-06	DIODE ERC25-06S		R620	1-206-690-00	METAL OXIDE 12K 5% 2W	F
D604	8-719-300-45	DIODE EM1Z		R622	1-247-866-00	CARBON 30K 5% 1/6W	
D605	8-719-911-19	DIODE 1SS119		R623	1-247-891-00	CARBON 330K 5% 1/6W	
D606	8-719-100-35	DIODE RD5.6E-B2		R624	1-215-453-00	METAL 22K 1% 1/6W	
D608	8-719-924-06	DIODE ERC24-06S		R625	1-215-453-00	METAL 22K 1% 1/6W	
D609	8-719-300-45	DIODE EM1Z		R626	1-247-923-00	CARBON 470 5% 1/6W	
D651	8-719-101-43	DIODE RD4.3E-L2		R627	1-247-887-00	CARBON 220K 5% 1/6W	

**A**

KV1882AEB  
490

A

Ref.No.	Part No.	Description	Remark
C518	1-131-368-00	TANTALUM	3.3MF 10% 16V
C519	1-136-173-00	FILM	0.47MF 5% 50V
C520	1-123-333-00	ELECT	100MF 20% 16V
C521	1-123-380-00	ELECT	1MF 20% 50V
C522	1-106-196-00	MYLAR	0.01MF 10% 100V
C523	1-123-380-00	ELECT	1MF 20% 50V
C524	1-106-210-00	MYLAR	0.039MF 10% 100V
C525	1-123-323-00	ELECT	470MF 20% 16V
C526	1-123-447-00	ELECT	0.22MF 20% 50V
C527	1-106-204-00	MYLAR	0.022MF 10% 100V
C552	1-102-244-00	CERAMIC	220PF 10% 500V
C553	1-123-360-00	ELECT	100MF 20% 50V
C554	1-123-348-00	ELECT	470MF 20% 35V
C555	1-123-336-00	ELECT	470MF 20% 25V
C571	1-123-483-00	ELECT	47MF 20% 16V
C572	1-101-880-00	CERAMIC	47PF 5% 50V
C801	1-123-024-00	ELECT	33MF 10% 160V
C802	1-102-114-00	CERAMIC	470PF 10% 50V
C803	1-106-385-00	FILM	0.056 10% 200V
C804	1-102-038-00	CERAMIC	0.001MF 500V
C805	1-136-067-11	FILM	0.0036MF 3% 2KV
C806	1-102-212-00	CERAMIC	820PF 10% 500V
C807	1-136-115-00	FILM	0.56MF 5% 200V
C808	1-136-120-00	FILM	0.22MF 5% 400V
C809	1-102-112-00	CERAMIC	330PF 10% 50V
C810	1-121-806-00	ELECT	10MF 16V
C811	1-102-244-00	CERAMIC	220PF 10% 500V
C812	1-162-115-00	CERAMIC	330PF 10% 2KV
C813	1-106-200-00	MYLAR	0.015MF 10% 100V
C814	1-136-067-11	FILM	0.0036MF 3% 2KV
C815	1-123-380-00	ELECT	1MF 20% 50V
C816	1-108-692-11	MYLAR	0.01MF 10% 200V
C817	1-123-928-00	ELECT	0.47MF 20% 160V
C851	1-123-005-00	ELECT	22MF 250V
C852	1-102-223-00	CERAMIC	0.0047MF 10% 2KV
C853	1-162-134-11	CERAMIC	470PF 10% 2KV
C854	1-123-334-00	ELECT	220MF 20% 25V
C855	1-123-252-00	ELECT	1MF 160V
C856	1-162-134-11	CERAMIC	470PF 10% 2KV
C857	1-108-425-00	MYLAR	0.022MF 10% 200V
C858	1-101-004-00	CERAMIC	0.01MF 50V
C859	1-123-333-00	ELECT	100MF 20% 16V
C860	1-102-228-00	CERAMIC	470PF 10% 500V
C863	1-123-348-00	ELECT	470MF 20% 35V
C864	1-106-220-00	MYLAR	0.1MF 10% 100V
C865	1-106-220-00	MYLAR	0.1MF 10% 100V
C871	1-123-356-00	ELECT	10MF 20% 50V
C872	1-123-330-00	ELECT	22MF 20% 16V
C873	1-123-359-00	ELECT	47MF 20% 50V
C874	1-123-379-00	ELECT	0.47MF 20% 50V
C875	1-123-379-00	ELECT	0.47MF 20% 50V
C876	1-123-369-00	ELECT	4.7MF 20% 50V
C877	1-101-004-00	CERAMIC	0.01MF 50V

Ref.No.	Part No.	Description	Remark
FILTER			
CF241	1-409-332-00	CERAMIC TRAP (4.5MHZ)	
CF242	1-527-943-00	FILTER, CERAMIC	
CF243	1-404-469-00	DISCRIMINATOR, CERAMIC 4.5MHZ	
CF251	1-404-134-00	TRAP, CERAMIC (5.5MHZ)	
CF252	1-567-099-00	FILTER, CERAMIC	
CF253	1-404-473-00	DISCRIMINATOR, CERAMIC	
CF261	1-409-333-00	TRAP, CERAMIC (6.0MHZ)	
CF262	1-567-100-00	FILTER, CERAMIC	
CF263	1-404-490-00	DISCRIMINATOR, CERAMIC(6.0MHZ)	
CF301	1-409-338-00	TRAP, CERAMIC (4.328MHZ)	
CF401	1-409-344-00	CERAMIC TRAP 3.58MHZ	
DIODE			
D151	8-719-102-36	DIODE RD36E-L1	
D201	8-719-102-91	DIODE RD10E-N3	
D202	8-719-911-19	DIODE 1SS119	
D241	8-719-102-73	DIODE RD6.2E-N1	
D251	8-719-102-73	DIODE RD6.2E-N1	
D261	8-719-102-73	DIODE RD6.2E-N1	
D301	8-719-911-19	DIODE 1SS119	
D302	8-719-911-19	DIODE 1SS119	
D303	8-719-911-19	DIODE 1SS119	
D304	8-719-911-19	DIODE 1SS119	
D305	8-719-911-19	DIODE 1SS119	
D306	8-719-911-19	DIODE 1SS119	
D307	8-719-911-19	DIODE 1SS119	
D308	8-719-911-19	DIODE 1SS119	
D391	8-719-911-19	DIODE 1SS119	
D392	8-719-911-19	DIODE 1SS119	
D393	8-719-911-19	DIODE 1SS119	
D394	8-719-911-19	DIODE 1SS119	
D401	8-719-911-19	DIODE 1SS119	
D402	8-719-911-19	DIODE 1SS119	
D403	8-719-911-19	DIODE 1SS119	
D501	8-719-911-19	DIODE 1SS119	
D502	8-719-911-19	DIODE 1SS119	
D503	8-719-911-19	DIODE 1SS119	
D551	8-719-911-55	DIODE U05G	
D571	8-719-911-19	DIODE 1SS119	
D801	8-719-305-15	DIODE GH3F	
D802	8-719-901-93	DIODE V19E	
D803	8-719-911-55	DIODE U05G	
D851	8-719-924-06	DIODE ERC24-06S	
D852	8-719-903-09	DIODE V30N	
D853	8-719-924-06	DIODE ERC24-06S	
D854	8-719-911-55	DIODE U05G	
D855	8-719-924-06	DIODE ERC24-06S	
D856	8-719-102-99	DIODE RD13E-N1	
D871	8-719-901-94	DIODE V19CS	
D872	8-719-100-35	DIODE RD5.6E-B2	

Remark

Ref.No.	Part No.	Description	Remark
DELAY LINE			
DL301	1-415-176-00	DELAY LINE	
DL302	1-415-122-31	DELAY LINE	
IC			
IC151	8-759-800-12	IC LA7920	
IC201	8-752-001-51	IC CX20015A	
IC202	8-759-240-52	IC TC4052BP	
IC281	8-759-101-77	IC UPC1241H	
IC301	8-751-080-00	IC CX108	
IC302	8-751-090-10	IC CX109	
IC303	8-759-240-53	IC TC4053BP	
IC501	8-759-100-60	IC UPC1377C	
IC551	8-759-113-78	IC UPC1378H-L	
IC571	8-759-909-70	IC CX23025	
COIL			
L151	1-408-454-00	MICRO INDUCTOR 100UH	
L152	1-408-397-00	MICRO INDUCTOR 1UH	
L202	1-408-397-00	MICRO INDUCTOR 1UH	
L203	1-408-418-00	MICRO INDUCTOR 56UH	
L241	1-408-410-00	MICRO INDUCTOR 12UH	
L242	1-408-402-00	MICRO INDUCTOR 2.7UH	
L243	1-408-414-00	MICRO INDUCTOR 27UH	
L244	1-408-417-00	MICRO INDUCTOR 47UH	
L245	1-409-372-00	COIL, TRAP	
L246	1-409-372-00	COIL, TRAP	
L251	1-408-411-00	MICRO INDUCTOR 15UH	
L252	1-408-400-00	MICRO INDUCTOR 1.8UH	
L253	1-408-413-00	MICRO INDUCTOR 22UH	
L261	1-408-409-00	MICRO INDUCTOR 10UH	
L262	1-408-399-00	MICRO INDUCTOR 1.5UH	
L263	1-408-411-00	MICRO INDUCTOR 15UH	
L301	1-408-407-00	MICRO INDUCTOR 6.8UH	
L302	1-408-417-00	MICRO INDUCTOR 47UH	
L303	1-408-455-11	MICRO INDUCTOR 120UH	
L304	1-408-410-00	MICRO INDUCTOR 12UH	
L305	1-408-415-00	MICRO INDUCTOR 33UH	
L306	1-408-409-00	MICRO INDUCTOR 10UH	
L307	1-407-507-00	MICRO INDUCTOR 18MH	
L308	1-408-415-00	MICRO INDUCTOR 33UH	
L310	1-408-410-00	MICRO INDUCTOR 12UH	
L401	1-408-408-00	MICRO INDUCTOR 8.2UH	
L402	1-408-419-00	MICRO INDUCTOR 68UH	
L403	1-408-413-00	MICRO INDUCTOR 22UH	
L571	1-408-409-00	MICRO INDUCTOR 10UH	
L801	1-407-556-00	CHOKE COIL	
L803	1-407-365-00	COIL, CHOKE	
L804	1-459-407-11	COIL, FERRITE CHOKE 30UH	
L805	1-459-496-11	COIL, FERRITE (HLC)	
L806	1-459-349-21	COIL, VAR, FERRITE (HMC)	
L851	1-408-240-00	MICRO INDUCTOR 6.8MMH	

Remark

Ref.No.	Part No.	Description	Remark
L852	1-407-556-00	CHOKE COIL	
TRANSISTOR			
Q151	8-729-245-83	TRANSISTOR 2SC2458	
Q201	8-724-375-01	TRANSISTOR 2SC403C	
Q202	8-729-177-43	TRANSISTOR 2SD774	
Q203	8-729-204-83	TRANSISTOR 2SA1048GR	
Q241	8-729-204-83	TRANSISTOR 2SA1048GR	
Q242	8-729-204-83	TRANSISTOR 2SA1048GR	
Q243	8-729-900-36	TRANSISTOR DTC124ES	
Q244	8-729-900-36	TRANSISTOR DTC124ES	
Q245	8-729-900-36	TRANSISTOR DTC124ES	
Q251	8-729-204-83	TRANSISTOR 2SA1048GR	
Q252	8-729-204-83	TRANSISTOR 2SA1048GR	
Q253	8-729-900-36	TRANSISTOR DTC124ES	
Q261	8-729-204-83	TRANSISTOR 2SA1048GR	
Q262	8-729-204-83	TRANSISTOR 2SA1048GR	
Q263	8-729-900-36	TRANSISTOR DTC124ES	
Q271	8-729-900-36	TRANSISTOR DTC124ES	
Q281	8-729-177-32	TRANSISTOR 2SD773	
Q301	8-724-375-01	TRANSISTOR 2SC403C	
Q302	8-729-245-83	TRANSISTOR 2SC2458	
Q303	8-729-103-43	TRANSISTOR 2SB734	
Q304	8-729-245-83	TRANSISTOR 2SC2458	
Q305	8-729-245-83	TRANSISTOR 2SC2458	
Q306	8-729-245-83	TRANSISTOR 2SC2458	
Q307	8-729-245-83	TRANSISTOR 2SC2458	
Q308	8-729-245-83	TRANSISTOR 2SC2458	
Q309	8-729-245-83	TRANSISTOR 2SC2458	
Q310	8-729-105-72	TRANSISTOR 2SK523-L1	
Q311	8-729-900-36	TRANSISTOR DTC124ES	
Q391	8-729-245-83	TRANSISTOR 2SC2458	
Q392	8-729-245-83	TRANSISTOR 2SC2458	
Q393	8-729-245-83	TRANSISTOR 2SC2458	
Q401	8-729-105-72	TRANSISTOR 2SK523-L1	
Q402	8-729-245-83	TRANSISTOR 2SC2458	
Q403	8-729-245-83	TRANSISTOR 2SC2458	
Q404	8-729-245-83	TRANSISTOR 2SC2458	
Q405	8-729-245-83	TRANSISTOR 2SC2458	
Q406	8-729-245-83	TRANSISTOR 2SC2458	
Q407	8-729-245-83	TRANSISTOR 2SC2458	
Q408	8-729-245-83	TRANSISTOR 2SC2458	
Q409	8-729-204-83	TRANSISTOR 2SA1048GR	
Q410	8-729-105-72	TRANSISTOR 2SK523-L1	
Q411	8-729-245-83	TRANSISTOR 2SC2458	
Q412	8-729-245-83	TRANSISTOR 2SC2458	
Q571	8-729-900-36	TRANSISTOR DTC124ES	
Q572	8-729-900-36	TRANSISTOR DTC124ES	
Q573	8-729-900-36	TRANSISTOR DTC124ES	

Remark

A

Ref.No.	Part No.	Description	Remark
Q574	8-729-900-36	TRANSISTOR DTC124ES	
Q575	8-729-900-36	TRANSISTOR DTC124ES	
Q801	8-729-168-82	TRANSISTOR 2SC2688	
Q802	8-729-800-35	TRANSISTOR 2SD1397	
Q803	8-729-245-83	TRANSISTOR 2SC2458	
Q804	8-729-245-83	TRANSISTOR 2SC2458	
Q851	8-729-313-42	TRANSISTOR 2SD1134	
Q871	8-729-245-83	TRANSISTOR 2SC2458	
Q872	8-729-204-83	TRANSISTOR 2SA1048GR	
RESISTOR			
R151	1-247-888-00	CARBON 240K 5% 1/6W	
R152	1-247-883-00	CARBON 150K 5% 1/6W	
R153	1-247-857-00	CARBON 12K 5% 1/6W	
R154	1-246-473-00	CARBON 1K 5% 1/4W	
R155	1-246-473-00	CARBON 1K 5% 1/4W	
R156	1-247-867-00	CARBON 33K 5% 1/6W	
R157	1-247-891-00	CARBON 330K 5% 1/6W	
R158	1-247-855-00	CARBON 10K 5% 1/6W	
R159	1-246-465-00	CARBON 470 5% 1/4W	
R160	1-247-871-00	CARBON 47K 5% 1/6W	
R161	1-247-888-00	CARBON 240K 5% 1/6W	
R162	1-247-883-00	CARBON 150K 5% 1/6W	
R201	1-247-797-00	CARBON 39 5% 1/6W	
R202	1-247-847-00	CARBON 4.7K 5% 1/6W	
R203	1-247-845-00	CARBON 3.9K 5% 1/6W	
R204	1-247-815-00	CARBON 220 5% 1/6W	
R205	1-247-823-00	CARBON 470 5% 1/6W	
R206	1-247-835-00	CARBON 1.5K 5% 1/6W	
R207	1-247-871-00	CARBON 47K 5% 1/6W	
R208	1-247-871-00	CARBON 47K 5% 1/6W	
R209	1-247-839-00	CARBON 2.2K 5% 1/6W	
R210	1-247-839-00	CARBON 2.2K 5% 1/6W	
R211	1-246-505-00	CARBON 22K 5% 1/4W	
R212	1-247-857-00	CARBON 12K 5% 1/6W	
R213	1-247-857-00	CARBON 12K 5% 1/6W	
R214	1-247-841-00	CARBON 2.7K 5% 1/6W	
R215	1-247-831-00	CARBON 1K 5% 1/6W	
R216	1-247-831-00	CARBON 1K 5% 1/6W	
R217	1-247-831-00	CARBON 1K 5% 1/6W	
R218	1-247-863-00	CARBON 22K 5% 1/6W	
R219	1-247-845-00	CARBON 3.9K 5% 1/6W	
R220	1-247-815-00	CARBON 220 5% 1/6W	
R221	1-247-883-00	CARBON 150K 5% 1/6W	
R222	1-246-489-00	CARBON 4.7K 5% 1/4W	
R223	1-247-831-00	CARBON 1K 5% 1/6W	
R224	1-247-873-00	CARBON 56K 5% 1/6W	
R225	1-247-873-00	CARBON 56K 5% 1/6W	
R226	1-246-469-00	CARBON 680 5% 1/4W	
R227	1-246-457-00	CARBON 220 5% 1/4W	
R241	1-247-879-00	CARBON 100K 5% 1/6W	
R242	1-247-831-00	CARBON 1K 5% 1/6W	
R243	1-247-817-00	CARBON 270 5% 1/6W	
R244	1-247-807-00	CARBON 100 5% 1/6W	
R245	1-246-473-00	CARBON 1K 5% 1/4W	

Ref.No.	Part No.	Description	Remark
R246	1-246-481-00	CARBON 2.2K 5% 1/4W	
R247	1-247-839-00	CARBON 2.2K 5% 1/6W	
R248	1-247-831-00	CARBON 1K 5% 1/6W	
R249	1-247-879-00	CARBON 100K 5% 1/6W	
R251	1-247-879-00	CARBON 100K 5% 1/6W	
R252	1-247-831-00	CARBON 1K 5% 1/6W	
R253	1-247-817-00	CARBON 270 5% 1/6W	
R254	1-247-807-00	CARBON 100 5% 1/6W	
R255	1-247-826-00	CARBON 620 5% 1/6W	
R258	1-247-828-00	CARBON 750 5% 1/6W	
R259	1-246-521-00	CARBON 100K 5% 1/4W	
R260	1-247-839-00	CARBON 2.2K 5% 1/6W	
R261	1-246-521-00	CARBON 100K 5% 1/4W	
R262	1-247-831-00	CARBON 1K 5% 1/6W	
R263	1-247-814-00	CARBON 200 5% 1/6W	
R264	1-247-807-00	CARBON 100 5% 1/6W	
R265	1-246-465-00	CARBON 470 5% 1/4W	
R268	1-247-828-00	CARBON 750 5% 1/6W	
R269	1-247-879-00	CARBON 100K 5% 1/6W	
R271	1-247-835-00	CARBON 1.5K 5% 1/6W	
R281	1-247-819-00	CARBON 330 5% 1/6W	
R282	1-247-863-00	CARBON 22K 5% 1/6W	
R283	1-247-831-00	CARBON 1K 5% 1/6W	
R284	1-247-071-00	CARBON 1 5% 1/4W	
R301	1-247-807-00	CARBON 100 5% 1/6W	
R302	1-247-835-00	CARBON 1.5K 5% 1/6W	
R304	1-246-509-00	CARBON 33K 5% 1/4W	
R306	1-247-849-00	CARBON 5.6K 5% 1/6W	
R307	1-247-833-00	CARBON 1.2K 5% 1/6W	
R308	1-247-813-00	CARBON 180 5% 1/6W	
R309	1-247-817-00	CARBON 270 5% 1/6W	
R310	1-247-843-00	CARBON 3.3K 5% 1/6W	
R311	1-247-863-00	CARBON 22K 5% 1/6W	
R312	1-247-843-00	CARBON 3.3K 5% 1/6W	
R313	1-247-853-00	CARBON 8.2K 5% 1/6W	
R314	1-247-863-00	CARBON 22K 5% 1/6W	
R315	1-247-843-00	CARBON 3.3K 5% 1/6W	
R321	1-247-823-00	CARBON 470 5% 1/6W	
R322	1-247-835-00	CARBON 1.5K 5% 1/6W	
R323	1-246-473-00	CARBON 1K 5% 1/4W	
R324	1-247-847-00	CARBON 4.7K 5% 1/6W	
R325	1-247-841-00	CARBON 2.7K 5% 1/6W	
R326	1-247-873-00	CARBON 56K 5% 1/6W	
R327	1-247-839-00	CARBON 2.2K 5% 1/6W	
R328	1-247-839-00	CARBON 2.2K 5% 1/6W	
R329	1-247-093-00	CARBON 27 5% 1/4W	
R330	1-247-155-00	CARBON 10K 5% 1/4W	
R331	1-247-141-00	CARBON 2.7K 5% 1/4W	
R332	1-247-875-00	CARBON 68K 5% 1/6W	
R333	1-247-823-00	CARBON 470 5% 1/6W	
R334	1-247-815-00	CARBON 220 5% 1/6W	

Ref.No.	Part No.	Description	Remark
R335	1-246-487-00	CARBON 3.9K 5% 1/4W	
R336	1-247-177-00	CARBON 82K 5% 1/4W	
R337	1-246-473-00	CARBON 1K 5% 1/4W	
R338	1-247-155-00	CARBON 10K 5% 1/4W	
R339	1-247-839-00	CARBON 2.2K 5% 1/6W	
R340	1-247-871-00	CARBON 47K 5% 1/6W	
R341	1-246-513-00	CARBON 47K 5% 1/4W	
R342	1-246-457-00	CARBON 220 5% 1/4W	
R343	1-246-469-00	CARBON 680 5% 1/4W	
R344	1-247-828-00	CARBON 750 5% 1/6W	
R345	1-247-853-00	CARBON 8.2K 5% 1/6W	
R346	1-247-855-00	CARBON 10K 5% 1/6W	
R347	1-247-807-00	CARBON 100 5% 1/6W	
R348	1-247-811-00	CARBON 150 5% 1/6W	
R349	1-247-823-00	CARBON 470 5% 1/6W	
R350	1-247-119-00	CARBON 330 5% 1/4W	
R351	1-246-493-00	CARBON 6.8K 5% 1/4W	
R352	1-247-857-00	CARBON 12K 5% 1/6W	
R353	1-247-839-00	CARBON 2.2K 5% 1/6W	
R354	1-247-807-00	CARBON 100 5% 1/6W	
R355	1-247-827-00	CARBON 680 5% 1/6W	
R356	1-247-855-00	CARBON 6.8K 5% 1/6W	
R357	1-247-831-00	CARBON 1K 5% 1/6W	
R358	1-247-821-00	CARBON 390 5% 1/6W	
R359	1-247-823-00	CARBON 470 5% 1/6W	
R361	1-247-831-00	CARBON 1K 5% 1/6W	
R363	1-247-831-00	CARBON 1K 5% 1/6W	
R364	1-247-845-00	CARBON 3.9K 5% 1/6W	
R365	1-247-847-00	CARBON 4.7K 5% 1/6W	
R367	1-247-851-00	CARBON 6.8K 5% 1/6W	
R368	1-247-831-00	CARBON 1K 5% 1/6W	
R371	1-247-889-00	CARBON 270K 5% 1/6W	
R372	1-247-857-00	CARBON 12K 5% 1/6W	
R373	1-247-855-00	CARBON 10K 5% 1/6W	
R374	1-246-489-00	CARBON 4.7K 5% 1/4W	
R375	1-246-477-00	CARBON 1.5K 5% 1/4W	
R376	1-247-841-00	CARBON 2.7K 5% 1/6W	
R377	1-247-875-00	CARBON 68K 5% 1/6W	
R378	1-247-875-00	CARBON 68K 5% 1/6W	
R379	1-247-125-00	CARBON 560 5% 1/4W	
R380	1-247-825-00	CARBON 560 5% 1/6W	
R381	1-247-825-00	CARBON 560 5% 1/6W	
R382	1-247-835-00	CARBON 1.5K 5% 1/6W	
R383	1-247-835-00	CARBON 1.5K 5% 1/6W	
R384	1-247-835-00	CARBON 1.5K 5% 1/6W	
R385	1-247-875-00	CARBON 68K 5% 1/6W	
R386	1-247-863-00	CARBON 33K 5% 1/6W	
R391	1-247-871-00	CARBON 47K 5% 1/6W	
R392	1-247-871-00	CARBON 47K 5% 1/6W	
R393	1-247-821-00	CARBON 390 5% 1/6W	
R394	1-247-867-00	CARBON 33K 5% 1/6W	
R395	1-247-867-00	CARBON 33K 5% 1/6W	
R396	1-246-517-00	CARBON 68K 5% 1/4W	
R401	1-247-871-00	CARBON 47K 5% 1/6W	

Ref.No.	Part No.	Description	Remark
R402	1-247-879-00	CARBON 100K 5% 1/6W	
R403	1-247-823-00	CARBON 470 5% 1/6W	
R404	1-247-835-00	CARBON 1.5K 5% 1/6W	
R405	1-247-871-00	CARBON 47K 5% 1/6W	
R406	1-247-841-00	CARBON 2.7K 5% 1/6W	
R407	1-247-871-00	CARBON 47K 5% 1/6W	
R408	1-247-891-00	CARBON 330K 5% 1/6W	
R409	1-246-513-00	CARBON 47K 5% 1/4W	
R410	1-247-891-00	CARBON 330K 5% 1/6W	
R411	1-247-807-00	CARBON 100 5% 1/6W	
R412	1-247-833-00	CARBON 1.2K 5% 1/6W	
R413	1-247-871-00	CARBON 47K 5% 1/6W	
R414	1-246-481-00	CARBON 2.2K 5% 1/4W	
R415	1-247-871-00	CARBON 47K 5% 1/6W	
R416	1-247-847-00	CARBON 4.7K 5% 1/6W	
R418	1-246-513-00	CARBON 47K 5% 1/4W	
R419	1-247-871-00	CARBON 47K 5% 1/6W	
R420	1-247-871-00	CARBON 47K 5% 1/6W	
R421	1-247-867-00	CARBON 33K 5% 1/6W	
R422	1-247-871-00	CARBON 47K 5% 1/6W	
R431	1-246-513-00	CARBON 47K 5% 1/4W	
R432	1-247-855-00	CARBON 10K 5% 1/6W	
R433	1-247-855-00	CARBON 10K 5% 1/6W	
R434	1-247-871-00	CARBON 47K 5% 1/6W	
R435	1-247-847-00	CARBON 4.7K 5% 1/6W	
R436	1-246-505-00	CARBON 22K 5% 1/4W	
R437	1-246-485-00	CARBON 3.3K 5% 1/4W	
R501	1-247-819-00	CARBON 330 5% 1/6W	
R502	1-247-817-00	CARBON 270 5% 1/6W	
R503	1-247-851-00	CARBON 6.8K 5% 1/8W	
R504	1-247-877-00	CARBON 82K 5% 1/6W	
R505	1-247-843-00	CARBON 3.3K 5% 1/6W	
R506	1-247-868-00	CARBON 36K 5% 1/6W	
R507	1-247-857-00	CARBON 12K 5% 1/6W	
R511	1-247-877-00	CARBON 82K 5% 1/6W	
R512	1-213-158-00	METAL OXIDE 18K 5% 1W	F
R514	1-214-768-00	METAL 43K 1% 1/4W	
R515	1-247-847-00	CARBON 4.7K 5% 1/6W	
R516	1-247-857-00	CARBON 12K 5% 1/6W	
R517	1-247-854-00	CARBON 9.1K 5% 1/6W	
R519	1-247-849-00	CARBON 5.6K 5% 1/6W	
R520	1-246-469-00	CARBON 680 5% 1/4W	
R521	1-247-820-00	CARBON 360 5% 1/6W	
R522	1-215-463-00	METAL 56K 1% 1/6W	
R523	1-247-793-00	CARBON 27 5% 1/6W	
R524	1-214-783-00	METAL 180K 1% 1/4W	
R525	1-215-455-00	METAL 27K 1% 1/6W	
R526	1-247-873-00	CARBON 56K 5% 1/6W	
R527	1-247-841-00	CARBON 2.7K 5% 1/6W	
R528	1-247-845-00	CARBON 3.9K 5% 1/6W	
R529	1-215-461-00	METAL 47K 1% 1/6W	

M2

KV1882AEB  
493

Ref.No.	Part No.	Description	Remark	Ref.No.	Part No.	Description	Remark	Ref.No.	Part No.	Description	Remark	Ref.No.	Part No.	Description	Remark	
D016	8-719-911-19	DIODE 1SS119		R012	1-246-463-00	CARBON 390 5% 1/4W		R069	1-247-872-00	CARBON 51K 5% 1/6W		C705	1-123-356-00	ELECT 10MF 20% 50V		
	<u>IC</u>			R013	1-246-463-00	CARBON 390 5% 1/4W		R070	1-247-867-00	CARBON 33K 5% 1/6W		C706	1-162-115-00	CERAMIC 330PF 10% 50V		
				R014	1-247-831-00	CARBON 1K 5% 1/6W		R071	1-213-159-00	METAL OXIDE 22K 5% 1W	F		<u>JACK</u>			
IC001	8-759-103-02	IC CX522-063		R015	1-247-883-00	CARBON 150K 5% 1/6W		R073	1-247-867-00	CARBON 33K 5% 1/6W						
IC002	8-757-959-00	IC CX7959		R016	1-247-831-00	CARBON 1K 5% 1/6W		R074	1-247-891-00	CARBON 330K 5% 1/6W		J701	1-526-762-00	SOCKET, CRT		
IC003	8-759-907-22	IC MB88301A						R075	1-247-871-00	CARBON 47K 5% 1/6W			<u>COIL</u>			
IC004	8-759-220-02	IC TC40H002P		R017	1-247-831-00	CARBON 1K 5% 1/6W		R076	1-247-897-00	CARBON 560K 5% 1/6W						
IC005	8-759-240-52	IC TC40S2BP		R018	1-247-831-00	CARBON 1K 5% 1/6W		R078	1-247-875-00	CARBON 68K 5% 1/6W		L701	1-407-708-00	MICRO INDUCTOR 180UH		
				R019	1-247-831-00	CARBON 1K 5% 1/6W		R079	1-247-839-00	CARBON 2.2K 5% 1/6W			<u>TRANSISTOR</u>			
IC006	8-759-157-40	IC UPC574J		R020	1-247-831-00	CARBON 1K 5% 1/6W		R080	1-247-842-00	CARBON 3K 5% 1/6W		Q701	8-729-322-78	TRANSISTOR 2SC2278		
	<u>COIL</u>			R021	1-247-831-00	CARBON 1K 5% 1/6W						Q702	8-729-322-78	TRANSISTOR 2SC2278		
L001	1-408-409-00	MICRO INDUCTOR 10UH		R022	1-247-871-00	CARBON 47K 5% 1/6W		R081	1-247-865-00	CARBON 27K 5% 1/6W		Q703	8-729-322-78	TRANSISTOR 2SC2278		
L002	1-408-397-00	MICRO INDUCTOR 1UH		R023	1-247-871-00	CARBON 47K 5% 1/6W		R082	1-247-841-00	CARBON 2.7K 5% 1/6W			<u>RESISTOR</u>			
L003	1-408-247-00	MICRO INDUCTOR 33MH		R024	1-246-505-00	CARBON 22K 5% 1/4W		R083	1-247-823-00	CARBON 470 5% 1/6W		R701	1-247-153-00	CARBON 8.2K 5% 1/4W		
L004	1-408-405-00	MICRO INDUCTOR 4.7UH		R025	1-247-863-00	CARBON 22K 5% 1/6W		R084	1-247-839-00	CARBON 2.2K 5% 1/6W		R702	1-247-153-00	CARBON 8.2K 5% 1/4W		
L005	1-408-409-00	MICRO INDUCTOR 10UH		R026	1-247-831-00	CARBON 1K 5% 1/6W		R085	1-247-826-00	CARBON 620 5% 1/6W		R703	1-247-853-00	CARBON 8.2K 5% 1/6W		
L006	1-407-780-00	COIL, SPOOK CHOKE		R027	1-247-855-00	CARBON 10K 5% 1/6W		R086	1-247-855-00	CARBON 10K 5% 1/6W		R704	1-247-119-00	CARBON 330 5% 1/4W		
	<u>TRANSISTOR</u>			R028	1-215-444-00	METAL 9.1K 1% 1/6W		R087	1-247-845-00	CARBON 3.9K 5% 1/6W		R705	1-246-460-00	CARBON 300 5% 1/4W		
				R029	1-215-445-00	METAL 10K 1% 1/6W		R088	1-247-826-00	CARBON 620 5% 1/6W						
Q001	8-729-177-43	TRANSISTOR 2SD774		R030	1-247-831-00	CARBON 1K 5% 1/6W		R091	1-247-831-00	CARBON 1K 5% 1/6W		R706	1-247-120-00	CARBON 360 5% 1/4W		
Q002	8-729-204-83	TRANSISTOR 2SA1048GR		R031	1-215-464-00	METAL 62K 1% 1/6W		R093	1-247-831-00	CARBON 1K 5% 1/6W		R707	1-247-815-00	CARBON 220 5% 1/6W		
Q003	8-729-245-83	TRANSISTOR 2SC2458		R032	1-247-847-00	CARBON 4.7K 5% 1/6W		R094	1-247-831-00	CARBON 1K 5% 1/6W		R708	1-247-815-00	CARBON 220 5% 1/6W		
Q004	8-729-245-83	TRANSISTOR 2SC2458		R033	1-247-847-00	CARBON 4.7K 5% 1/6W		R095	1-247-847-00	CARBON 4.7K 5% 1/6W		R709	1-246-457-00	CARBON 220 5% 1/4W		
Q005	8-729-245-83	TRANSISTOR 2SC2458		R034	1-247-831-00	CARBON 1K 5% 1/6W		R096	1-247-851-00	CARBON 6.8K 5% 1/6W		R710	1-206-692-00	METAL OXIDE 15K 5% 2W	F	
				R035	1-247-849-00	CARBON 5.6K 5% 1/6W		R097	1-247-847-00	CARBON 4.7K 5% 1/6W		R711	1-206-692-00	METAL OXIDE 15K 5% 2W	F	
Q006	8-729-204-83	TRANSISTOR 2SA1048GR		R036	1-247-879-00	CARBON 100K 5% 1/6W		R098	1-247-849-00	CARBON 5.6K 5% 1/6W		R712	1-206-692-00	METAL OXIDE 15K 5% 2W	F	
Q007	8-729-245-83	TRANSISTOR 2SC2458						R100	1-247-862-00	CARBON 20K 5% 1/6W		R713	1-202-824-00	SOLID 3.3K 1/2W		
Q008	8-729-245-83	TRANSISTOR 2SC2458		R037	1-247-831-00	CARBON 1K 5% 1/6W		R101	1-247-901-00	CARBON 820K 5% 1/6W		R714	1-202-824-00	SOLID 3.3K 1/2W		
Q009	8-729-245-83	TRANSISTOR 2SC2458		R038	1-247-831-00	CARBON 1K 5% 1/6W		R102	1-247-155-00	CARBON 10K 5% 1/4W		R715	1-202-824-00	SOLID 3.3K 1/2W		
Q010	8-729-245-83	TRANSISTOR 2SC2458		R039	1-247-831-00	CARBON 1K 5% 1/6W		R103	1-247-819-00	CARBON 330 5% 1/6W		R716	1-247-843-00	CARBON 3.3K 5% 1/6W		
				R040	1-247-871-00	CARBON 47K 5% 1/6W		R104	1-247-871-00	CARBON 47K 5% 1/6W		R717	1-247-843-00	CARBON 3.3K 5% 1/6W		
Q011	8-729-245-83	TRANSISTOR 2SC2458		R041	1-247-871-00	CARBON 47K 5% 1/6W		R105	1-247-831-00	CARBON 1K 5% 1/6W		R718	1-247-843-00	CARBON 3.3K 5% 1/6W		
Q012	8-729-245-83	TRANSISTOR 2SC2458		R042	1-247-831-00	CARBON 1K 5% 1/6W		R106	1-247-863-00	CARBON 22K 5% 1/6W		R719	1-202-846-00	SOLID 470K 1/2W		
Q013	8-729-204-83	TRANSISTOR 2SA1048GR		R043	1-247-831-00	CARBON 1K 5% 1/6W		R107	1-247-855-00	CARBON 10K 5% 1/6W		R720	1-202-837-00	SOLID 82K 1/2W		
Q014	8-729-245-83	TRANSISTOR 2SC2458		R044	1-247-831-00	CARBON 1K 5% 1/6W		R108	1-247-891-00	CARBON 330K 5% 1/6W		R721	1-202-549-00	SOLID 100 10% 1/2W		
Q015	8-729-245-83	TRANSISTOR 2SC2458		R045	1-247-831-00	CARBON 1K 5% 1/6W		R109	1-247-823-00	CARBON 470 5% 1/6W		R722	1-202-848-00	SOLID 680K 1/2W		
				R046	1-247-831-00	CARBON 1K 5% 1/6W			<u>CRYSTAL</u>			R723	1-202-847-00	SOLID 560K 1/2W		
Q016	8-729-245-83	TRANSISTOR 2SC2458		R047	1-247-831-00	CARBON 1K 5% 1/6W		R110	1-247-855-00	CARBON 10K 5% 1/6W		R724	1-202-847-00	SOLID 560K 1/2W		
Q017	8-729-245-83	TRANSISTOR 2SC2458		R048	1-247-895-00	CARBON 470K 5% 1/6W			X001	1-527-589-00	OSCILLATOR, CERAMIC	R725	1-202-847-00	SOLID 560K 1/2W		
Q018	8-729-245-83	TRANSISTOR 2SC2458		R050	1-247-863-00	CARBON 22K 5% 1/6W			*****			R726	1-207-451-00	WIREWOUND 0.1 10% 1/2W		
Q019	8-729-245-83	TRANSISTOR 2SC2458		R051	1-247-863-00	CARBON 22K 5% 1/6W			*:A-1330-499-A C BOARD, COMPLETE				<u>VARIABLE RESISTOR</u>			
Q020	8-729-245-83	TRANSISTOR 2SC2458		R052	1-247-863-00	CARBON 22K 5% 1/6W			*****			RV701	1-230-106-00	RES, ADJ, CARBON 10K		
	<u>RESISTOR</u>			R054	1-247-831-00	CARBON 1K 5% 1/6W			*:4-365-803-00 COVER (MAIN), CV CONTROL			RV702	1-230-106-00	RES, ADJ, CARBON 10K		
R001	1-247-815-00	CARBON 220 5% 1/6W		R055	1-247-885-00	CARBON 180K 5% 1/6W			*:4-365-804-00 COVER (REAR LID), CV CONTROL			RV703	1-230-106-00	RES, ADJ, CARBON 10K		
R002	1-247-827-00	CARBON 680 5% 1/6W		R056	1-215-462-00	METAL 51K 1% 1/6W			<u>CONNECTOR</u>			RV704	1-230-460-11	RES, ADJ, CARBON 330		
R003	1-247-865-00	CARBON 27K 5% 1/6W		R057	1-247-841-00	CARBON 2.7K 5% 1/6W			C1 *:1-506-371-00 2P PLUG (L)			RV705	1-230-460-11	RES, ADJ, CARBON 330		
R004	1-247-855-00	CARBON 10K 5% 1/6W		R058	1-247-855-00	CARBON 10K 5% 1/6W			<u>CAPACITOR</u>							
R005	1-247-831-00	CARBON 1K 5% 1/6W		R059	1-247-879-00	CARBON 100K 5% 1/6W						RV706	1-226-114-00	RES, ADJ, METAL GLAZE 2.2M		
R006	1-247-871-00	CARBON 47K 5% 1/6W		R060	1-247-857-00	CARBON 12K 5% 1/6W						RV707	1-226-114-00	RES, ADJ, METAL GLAZE 2.2M		
R007	1-247-855-00	CARBON 10K 5% 1/6W		R061	1-247-831-00	CARBON 1K 5% 1/6W						RV708	1-230-164-11	RES, ADJ, METAL GLAZE 55M		
R008	1-247-855-00	CARBON 10K 5% 1/6W		R064	1-247-855-00	CARBON 10K 5% 1/6W										
R009	1-246-473-00	CARBON 1K 5% 1/4W		R065	1-247-887-00	CARBON 220K 5% 1/6W										
R010	1-246-473-00	CARBON 1K 5% 1/4W														
R011	1-246-463-00	CARBON 390 5% 1/4W		R066	1-247-872-00	CARBON 51K 5% 1/6W										
				R067	1-247-793-00	CARBON 27 5% 1/6W										
				R068	1-247-855-00	CARBON 10K 5% 1/6W										




Ref.No.	Part No.	Description	Remark
		MISCELLANEOUS	
		*****	
	Δ 1-451-247-11	DEFLECTION YOKE (SY-139)	
	1-452-032-00	MAGNET, DISK; 10MM Ø	
	1-452-094-00	MAGNET, ROTATABLE DISK; 15MM Ø	
	1-452-277-00	MAGNET, BMC	
	*1-534-805-00	PIN CABLE	
	Δ 1-536-494-11	ANT TERMINAL ASSY	
	Δ 1-551-427-21	CORD, POWER, EULO PLUG	
L901	Δ 1-426-179-11	COIL, DEGAUSSING	
L902	Δ 1-426-179-11	COIL, DEGAUSSING	
S901	Δ 1-553-225-12	SWITCH, PUSH	
SP901	1-503-239-00	SPEAKER	
T851	Δ 1-439-333-11	TRANSFORMER ASSY, FLYBACK	
TU151	Δ 1-463-421-00	TUNER, ET (BT-883)	
V901	Δ 8-736-153-05	CRT (A44JFZ00X)	


\*\*\*\*\*

ACCESSORIES AND PACKING MATERIALS

\*\*\*\*\*

Part No.	Description	Remark
A-1470-677-A	COMMANDER ASSY (RM-626)	
1-417-094-00	MIXER, U/V (PAL)	
1-501-284-00	ANTENNA, TELESCOPIC (AN-18E) (E ONLY)	
1-501-329-11	ANTENNA, TELESCOPIC (E ONLY)	
1-506-409-00	ADAPTOR, CONVERSION	
1-513-382-00	ANTENNA, MUTCHING (E ONLY)	
3-701-622-00	BAG, POLYESTYLENE	
4-369-325-01	BAG, PROTECTION	
4-371-527-01	CUSHION (UPPER) (ASSY)	
4-371-528-01	CUSHION (LOWER) (ASSY)	
4-371-547-01	INDIVIDUAL CARTON	
4-491-791-01	SCHEMATIC DIAGRAM (B2)	
4-491-827-41	INSTRUCTION, ACCESSORY (PX ONLY))	
4-491-827-51	INSTRUCTION, ACCESSORY (E ONLY)	
4-493-928-71	MANUAL, INSTRUCTION (PX ONLY)	
4-493-994-61	MANUAL, INSTRUCTION (E ONLY)	

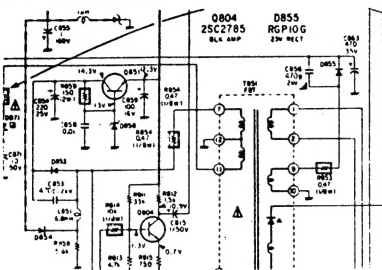Incorrect	
<p><b>PX Model</b> Serial No. 500,001 – 505,300 Chassis No. SCC-573A-A Serial No. 503,001 and later Chassis No. SCC-573A-B</p> <p><b>E Model</b> Chassis No. SCC-573A-B</p>	
	

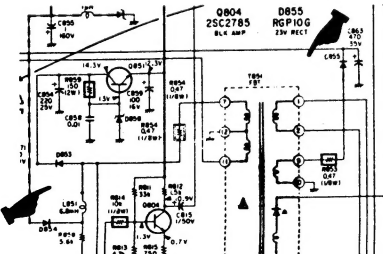Correct	
<p><b>PX Model</b> Serial No. 500,001 – 503,000 ✂ Chassis No. SCC-573A-A</p> <p><b>E Model</b> Chassis No. SCC-573A-B</p>	<p><b>PX Model</b> Serial No. 503,001 and later Chassis No. SCC-573A-B ✂ Serial No. 2,000,001 and later Chassis No. SCC-573A-B</p> <p><b>E Model</b> Chassis No. SCC-573A-B</p>
	

# KV-1882AEB

## RM-626

### PX Model

Serial No. 500,001 – 503,000

Chassis No. SCC-573A-A

Serial No. 503,001 and later

Chassis No. SCC-573A-B

Serial No. 2,000,001 and later

Chassis No. SCC-573A-B

\*Chassis Model Number Label of KV-1882AEB PX model serial number 2,002,401 to 2,003,200 are printed incorrect number, SCC-573A-A. Correct chassis number is SCC-573A-B.

## CORRECTION

Correct the service manual as shown below.  
File this correction with the service manual.

### E Model

Chassis No. SCC-573A-B

August, 1986

No. 1

✂ : Corrected Portion

✂ : Added Portion

Incorrect	Correct
<p><b>PX Model</b> Serial No. 500,001 – 505,300 Chassis No. SCC-573A-A Serial No. 503,001 and later Chassis No. SCC-573A-B</p> <p><b>E Model</b> Chassis No. SCC-573A-B</p>	<p><b>PX Model</b> ✂ Serial No. 500,001 – 503,000 Chassis No. SCC-573A-A Serial No. 503,001 and later Chassis No. SCC-573A-B ✂ Serial No. 2,000,001 and later Chassis No. SCC-573A-B</p> <p>* Chassis Model Number Label of KV-1882AEB PX model serial number 2,002,401 to 2,003,200 are printed incorrect number, SCC-573A-A. Correct chassis number is SCC-573A-B.</p> <p><b>E Model</b> Chassis No. SCC-573A-B</p>
<p><b>SPECIFICATIONS</b> Power consumption 82 W</p>	<p><b>SPECIFICATIONS</b> ✂ Power consumption 85 W</p>